

MOTOR SUPPRESSOR

RC, 3x690VAC/7,5kW

3× 400 V AC

3× 575 V AC

3× 690 V AC



RC

For DIN-rail mounting use 2×Art.-No. 20900 adapter feet

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Länk till produkt

Illustration

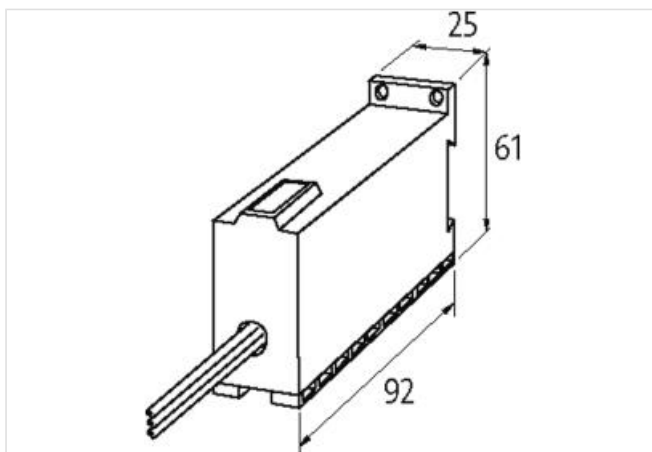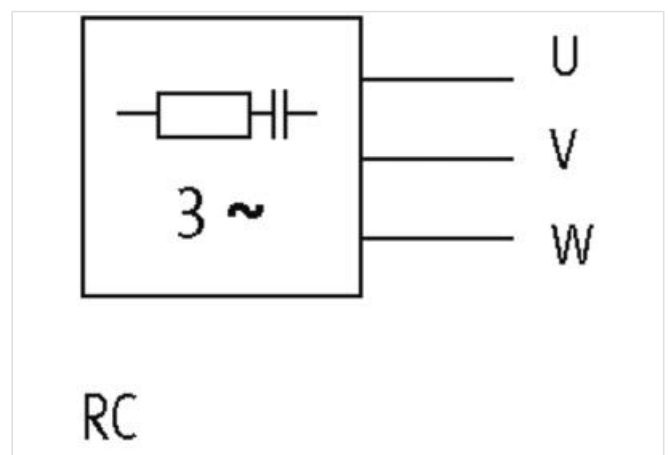

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013

ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013
ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC000197
Förpackningsenhet	1
GTIN	4048879019347
Kundens tullnummer	85363010

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	690 V
------------------	-------

Installation

Connection cross section max.	1 mm ²
-------------------------------	-------------------

Installation | Connection

Connection information	Single strands
Length single strands	500 mm

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
Material housing	Plastic
Material potting compound	2-component epoxy

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	92 mm
Width	61 mm
Depth	25 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C