

**SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE**

24V LED+Z-Diode M16x1.5

Form A (18 mm)

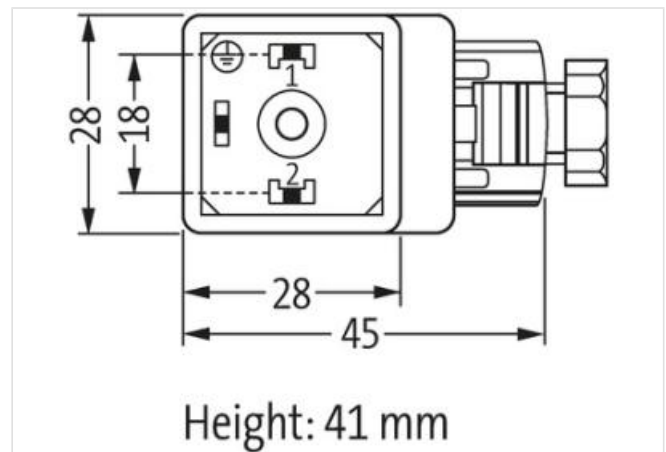
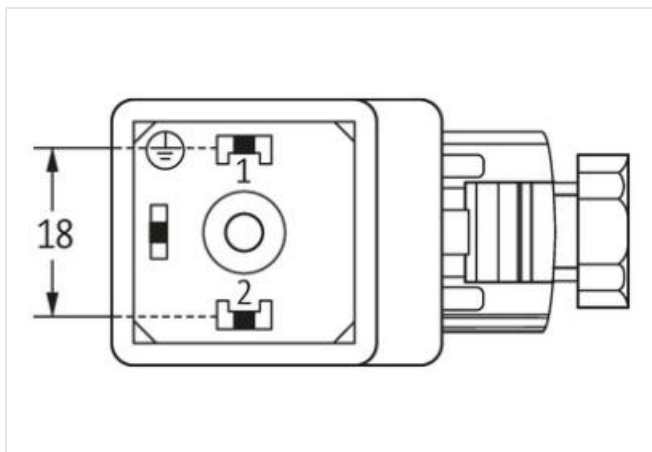
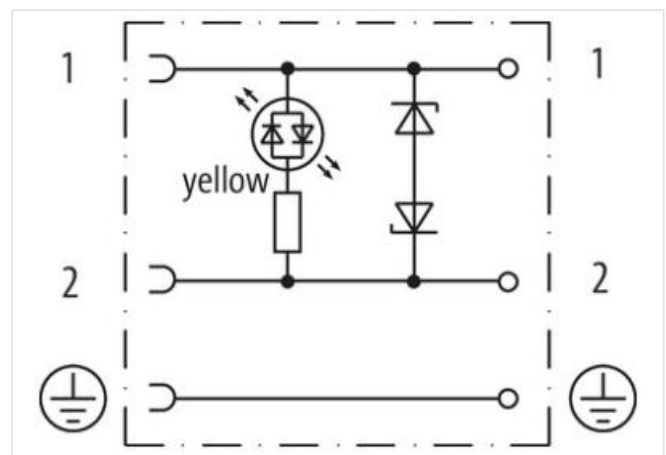
 24 V AC/DC  $\pm 25\%$ 

LED and Z-diode

metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**Länk till produkt**
**Illustration**


Produkten kan skilja sig från bilden

**Side 1**

Degree of protection (EN IEC 60529)

IP65

**Kommersiella uppgifter**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27279221 |
| ECLASS-7.0  | 27440104 |
| ECLASS-8.0  | 27440104 |
| ECLASS-9.0  | 27440102 |
| ECLASS-10.1 | 27440105 |
| ECLASS-11.1 | 27440105 |

|                    |               |
|--------------------|---------------|
| ECLASS-12.0        | 27440105      |
| ETIM-5.0           | EC002062      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879187688 |
| Kundens tullnummer | 85366990      |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC               | 24 V |
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 4 A  |

**Diagnostics**

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

**Installation | Connection**

|                                  |                   |
|----------------------------------|-------------------|
| Connection information           | Wire end ferrules |
| Tightening torque                | 0,4 Nm            |
| Tightening torque clamping screw | 0,2 Nm            |
| Mounting set                     | M3                |

**Installation | Pin assignment**

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |

**Mechanical data | Mounting data**

|                     |       |
|---------------------|-------|
| Clamping range min. | 5 mm  |
| Clamping range max. | 10 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |