

## SVS Eco valve plug A-18mm screw terminal

2-pol. + PE, 0,5 - 1,5mm<sup>2</sup>, 6 - 8mm, LED+VDR 24V

Form A (18 mm)

24 V AC/DC  $\pm 15\%$

LED and VDR

metric




field-wireable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### Länk till produkt

#### Illustration

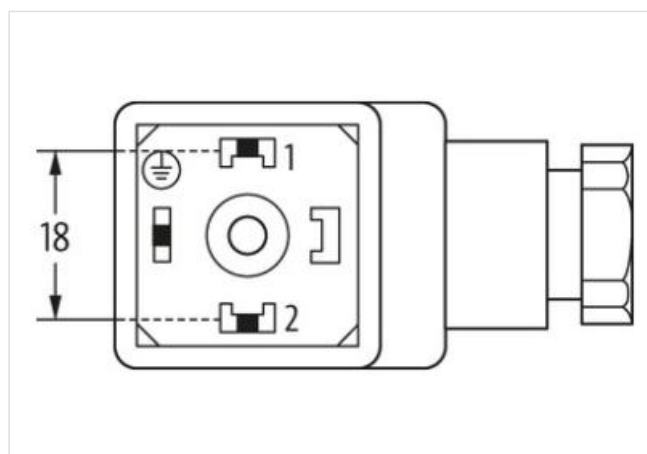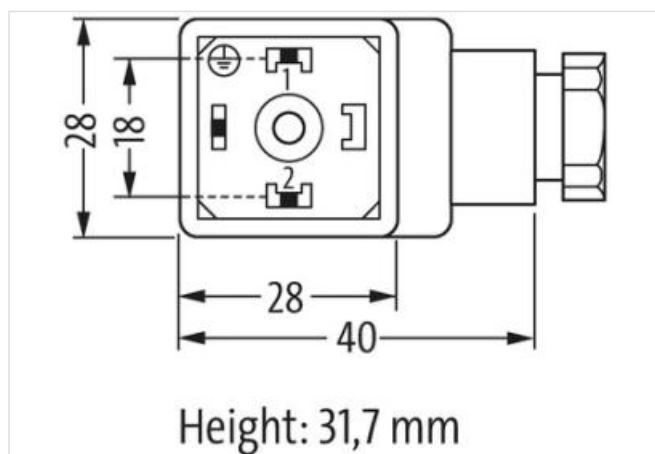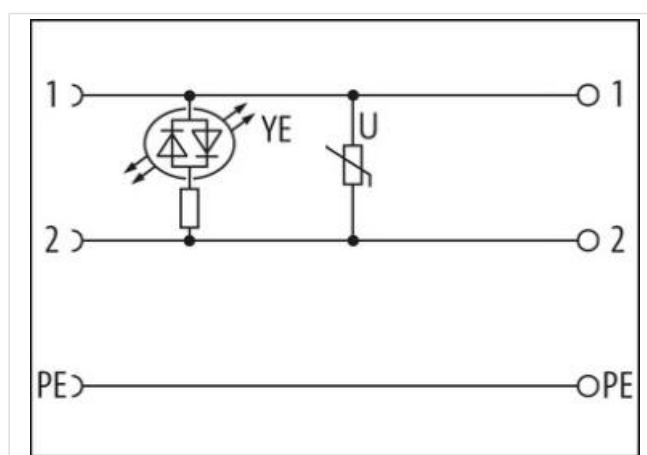

Produkten kan skilja sig från bilden



#### Side 1

Mounting method inserted, screwed

Degree of protection (EN IEC 60529) IP65

#### Kommersiella uppgifter

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27279221      |
| ECLASS-7.0         | 27440104      |
| ECLASS-8.0         | 27440104      |
| ECLASS-9.0         | 27440102      |
| ECLASS-10.1        | 27440105      |
| ECLASS-11.1        | 27440105      |
| ECLASS-12.0        | 27440105      |
| ETIM-5.0           | EC002062      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879187671 |
| Kundens tullnummer | 85366990      |

**Electrical data | Supply**

|                                    |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 20,4 V |
| Operating voltage AC max.          | 26,4 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 20,4 V |
| Operating voltage DC max.          | 26,4 V |
| Current operating per contact max. | 1,5 A  |

**Diagnostics**

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

**Installation**

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section min. | 0,5 mm <sup>2</sup> |
| Connection cross section max. | 1,5 mm <sup>2</sup> |

**Installation | Connection**

|                                  |           |
|----------------------------------|-----------|
| Tightening torque                | 0,4 Nm    |
| Tightening torque clamping screw | 0,2 Nm    |
| Mounting set                     | M16 x 1.5 |

**Installation | Pin assignment**

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Additional suppressor                  | Varistor          |

**Mechanical data | Material data**

|                  |        |
|------------------|--------|
| Color housing    | opaque |
| Material gasket  | NBR    |
| Material housing | PA     |

**Mechanical data | Mounting data**

|                     |      |
|---------------------|------|
| fastening screw     | M3   |
| Clamping range min. | 6 mm |
| Clamping range max. | 8 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
| Operating temperature max. | 90 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |