




# **Adaptor M8 male / M12 female A-cod.**


3-pol. / 3-pol., conf. 1,3,4

Adapter  
Male - female  
M8 – M12, 3-pole  
for M8 distribution box 3-pole

## Länk till produkt

### Illustration

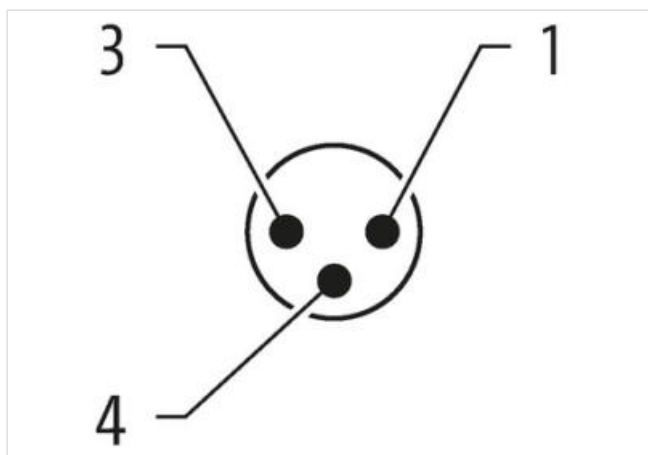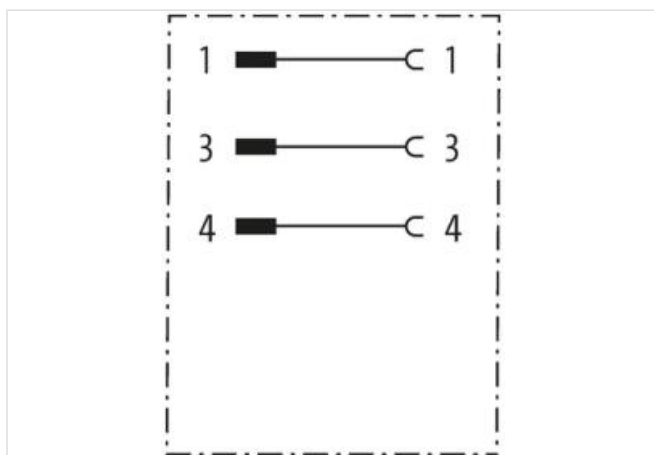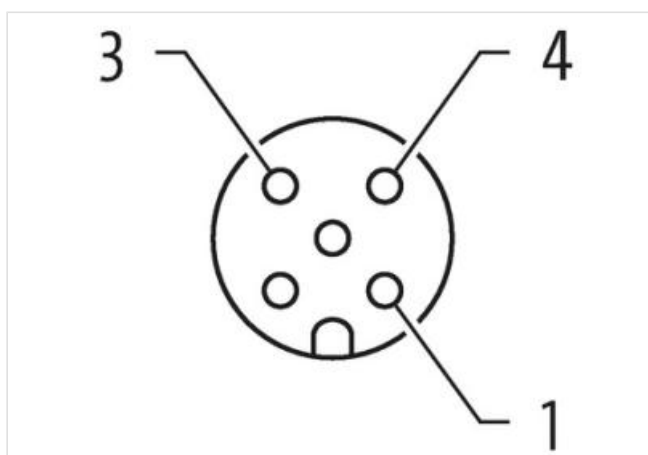

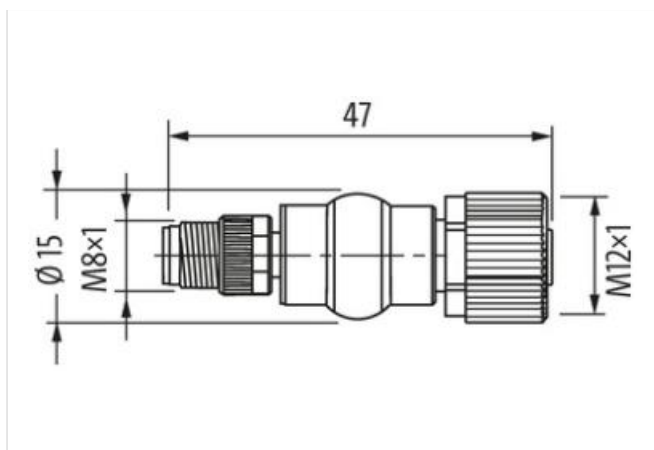

Produkten kan skilja sig från bilden



#### Side 1

|                          |        |
|--------------------------|--------|
| Tightening torque        | 0,4 Nm |
| Family construction form | M8     |
| Thread                   | M8 x 1 |
| Coding                   | A      |
| Width across flats       | SW9    |

#### Side 2

|                          |         |
|--------------------------|---------|
| Tightening torque        | 0,6 Nm  |
| Family construction form | M12     |
| Thread                   | M12 x 1 |
| Coding                   | A       |
| Width across flats       | SW13    |

#### Kommersiella uppgifter

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27143423      |
| ECLASS-6.1         | 27260702      |
| ECLASS-7.0         | 27440102      |
| ECLASS-8.0         | 27440102      |
| ECLASS-9.0         | 27440106      |
| ECLASS-10.1        | 27440102      |
| ECLASS-11.1        | 27440102      |
| ECLASS-12.0        | 27440106      |
| ETIM-5.0           | EC001855      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879118521 |
| Kundens tullnummer | 85366990      |

#### Electrical data | Supply

|                                       |      |
|---------------------------------------|------|
| Operating voltage AC max.             | 50 V |
| Operating voltage DC max.             | 60 V |
| Operating voltage AC max. (UL-listed) | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated insulation voltage               | 800 V             |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickeled         |
| Material housing | PUR              |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |