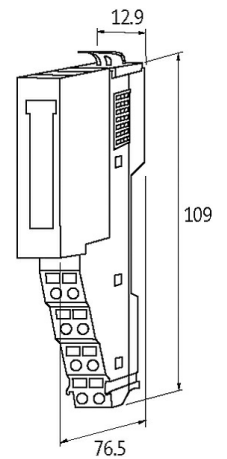



**CUBE20S DIGITAL OUTPUT MODULE DO8**

8x24VDC 0,5A

[Länk till produkt](#)**Illustration**

Produkten kan skilja sig från bilden

**Godkännanden****Internal communication**

Module supply	via system connection
Current consumption	max. 65 mA

**General data**

Protection	IP20
Connection	Spring clamp plug-in terminals: max. 1.5 mm <sup>2</sup> (AWG 16)
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C (storage temperature -25...+70 °C)
Dimensions H×W×D	109×12.9×76.5 mm

Output	
Actuator supply UA	24 V DC (EN 61131-2), max. 4 A
Switching current per output	max. 0.5 A (short-circuit and overload protected)
Galvanic isolation	500 V DC between outputs and internal communication
Lamp load	5 W
Output delay time	175 ns
Diagnostic	
Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module
Monitoring - under voltage	yes
Monitoring - no voltage	no
Short-circuit and overload	yes
Kommersiella uppgifter	
EAN	4048879424639
eClass	27242604
Förpackningsenhet	1
Kundens tullnummer	85389099
Tillverknings land	TH