

Xelity 8TX Unmanaged Switch 8 Port 100Mbit

Art.Nr.: 58812

Vikt: 0.133

Tillverknings land: DE


Modellbeteckning: Xelity 8TX

8 port unmanaged switch

Connection cables are in the online shop under "Connection Technology".

Länk till produkt

Illustration

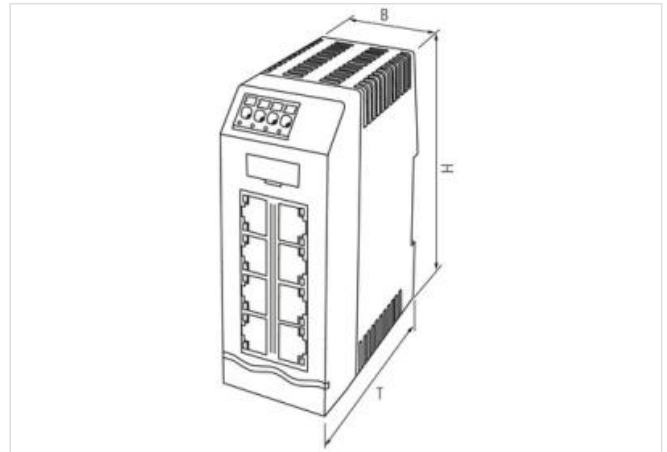

Produkten kan skilja sig från bilden



Kommersiella uppgifter

| | |
|--------------------|---------------|
| ECLASS-6.0 | 19170106 |
| ECLASS-6.1 | 19170106 |
| ECLASS-7.0 | 19170106 |
| ECLASS-8.0 | 19170106 |
| ECLASS-9.0 | 19170106 |
| ECLASS-10.1 | 19170402 |
| ECLASS-11.1 | 19170402 |
| ECLASS-12.0 | 19170402 |
| ETIM-5.0 | EC000734 |
| Förpackningsenhet | 1 |
| GTIN | 4048879798808 |
| Kundens tullnummer | 85176200 |

Electrical data | Supply

| | |
|---------------------------|--------|
| Operating voltage DC min. | 9,5 V |
| Operating voltage DC max. | 31,5 V |
| Power consumption max. | 1,2 W |
| Current consumption max. | 50 mA |

Industrial communication

| | |
|-----------------------------|------------|
| Data transmission rate max. | 100 MBit/s |
|-----------------------------|------------|

Industrial communication | Ethernet functionality

| | |
|---|----------------------------------|
| Auto-crossover | yes |
| Auto-negotiation | yes |
| duplex | Full duplex |
| Switch type | unmanaged |
| VLAN unmanaged (IEEE 802.1Q) | yes |
| Diagnostics | |
| Alarm contact | no |
| Diagnostic | No voltage |
| LED display | Ethernet connection/data traffic |
| Device protection Electrical | |
| Degree of protection (EN IEC 60529) | IP20 |
| Invers-polarity protection | yes |
| Over voltage protection | yes |
| Mechanical data Material data | |
| Color housing | black |
| Material housing | Plastic |
| Mechanical data Mounting data | |
| Mounting method | geschnappt |
| Suitable for mounting type | Mounting rail TH35, (EN 60715) |
| Height | 105 mm |
| Width | 41,6 mm |
| Depth | 85,1 mm |
| Environmental characteristics Climatic | |
| Operating temperature min. | -25 °C |
| Operating temperature max. | 60 °C |
| Storage temperature min. | -40 °C |
| Storage temperature max. | 85 °C |
| Connection type 2 | |
| Connection type 1 | 8 |
| Family construction form | RJ45 |
| Gender | female |
| Color contact carrier | black |
| No. of poles | 8 |
| PIN 1 | TD + |
| PIN 2 | TD - |
| PIN 3 | RD + |
| PIN 4 | n.c. |
| PIN 5 | n.c. |
| PIN 6 | RD - |
| PIN 7 | n.c. |
| PIN 8 | n.c. |
| Connection | Spring clamp terminals FK |
| Family construction form | terminal |
| Gender | female |
| Color contact carrier | green |
| No. of poles | 4 |
| PIN 1 | 24 V DC (UB 1) |
| PIN 2 | 0 V |
| PIN 3 | PE |
| PIN 4 | n.c. |