

**MEN POWER SUPPLY 1/2-PHASE, SMOOTHED**

IN: 230/400+/-15VAC OUT: 24V/2,5ADC

Art.Nr.: 85350

Vikt: 2,050 kg

Tillverknings land: CZ

Modellbeteckning: MEN 2,5-230-400 +/-15V/24VDC



Ström: 2.5 A

Utgångseffekt: 60 W

Transformator nätagreten uppfyller normen (EN 61000-3-2) för övertonsströmmar.

**Länk till produkt**

**Illustration**

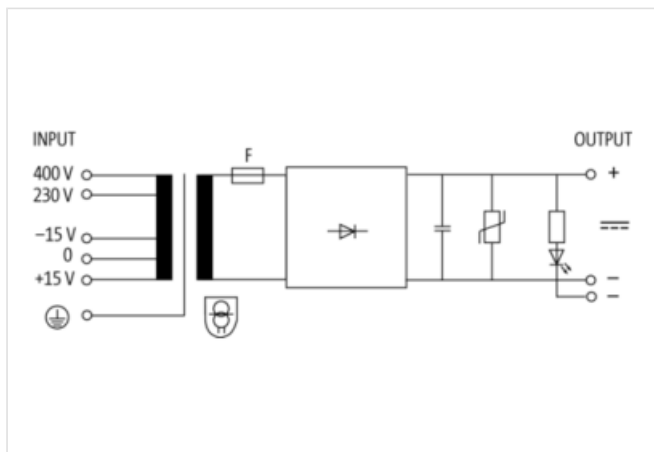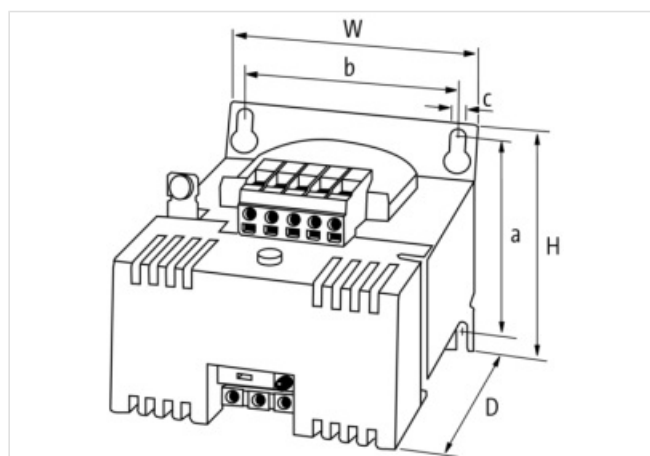

Produkten kan skilja sig från bilden



**Kommersiella uppgifter**

URL Webshop <https://shop.murrelektronik.com/85350>

GTIN 4048879080071

Customs tariff number 85044095

ECLASS-6.0 27049002

ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-7.1	27049002
ECLASS-8.0	27049002
ECLASS-8.1	27049002
ECLASS-9.0	27040701
ECLASS-9.1	27040701
ECLASS-10.0.1	27040701
ECLASS-10.1	27040701
ECLASS-11.0	27040701
ECLASS-11.1	27040701
ECLASS-12.0	27040701
ECLASS-13.0	27040701
ECLASS-14.0	27040701
ETIM-5.0	EC002540
ETIM-6.0	EC002540
ETIM-7.0	EC002540
ETIM-8.0	EC002540
EAN	4048879080071
Förpackningsenhet	1
Kundens tullnummer	85044095

**Electrical data | Supply**

Protective measure	SELV
Power frequency	50 ... 60 Hz

**Electrical data | Input**

Nominal input voltage AC	230 V ... 400 V
Nominal current AC	0.5 A @ 230 V, 0.28 A @ 400 V
Characteristic back-up fuse	Inertia
Fuse protection 1 primary side external	0.8 A @ 230 V AC
Fuse protection 2 primary side external	5 A @ 400 V AC

**Electrical data | Output**

Output voltage adjustable	No
Output voltage DC	24 V
Output current max.	0.8 A @ 230 V AC
Output current max.	3 A
Utgångsfilter	VDR, LED
Type of secondary fuse	Flat fuse FKS
Fuse protection secondary side external	7,5 A
Ripple max.	5 %

**Mechanical data | Mounting data**

Height	83 mm
Width	84 mm
Depth	124 mm
Suitable for mounting type	Keyhole mounting
Mounting dimension a	65,5 mm
Mounting dimension b	64 mm
Mounting dimension c	4,8 mm

**Environmental characteristics | Electromagnetic compatibility**

Interference emission	EN IEC 55011, IEC 61000-3-2
-----------------------	-----------------------------

**Environmental characteristics | Climatic**

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

Derating 40 °C

**Conformity**

Product standard EN IEC 61558-2-6

**Connection type 3**

Family construction form	terminal
Antal poler	1
Gender	female
Color contact carrier	metallic
Anslutning	Screw terminals SK
PIN 1	PE
Family construction form	terminal
Antal poler	3
Gender	female
Color contact carrier	grön
Anslutning	Screw terminals SK
PIN 1	+
PIN 2	-
PIN 3	-
Family construction form	terminal
Antal poler	5
Gender	female
Color contact carrier	grön
Anslutning	Screw terminals SK
PIN 1	+ 15 V
PIN 3	- 15 V
PIN 4	230 V
PIN 5	400 V