

## MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/2,5ADC

Art.Nr.: 8985350

Vikt: 2,150 kg

Tillverknings land: CZ

Modellbeteckning: MEN 2,5-230-400 ±15V/24VDC



Ström: 2.5 A

Utgångseffekt: 60 W

med MES adapter för DIN-skena

### Länk till produkt

#### Illustration

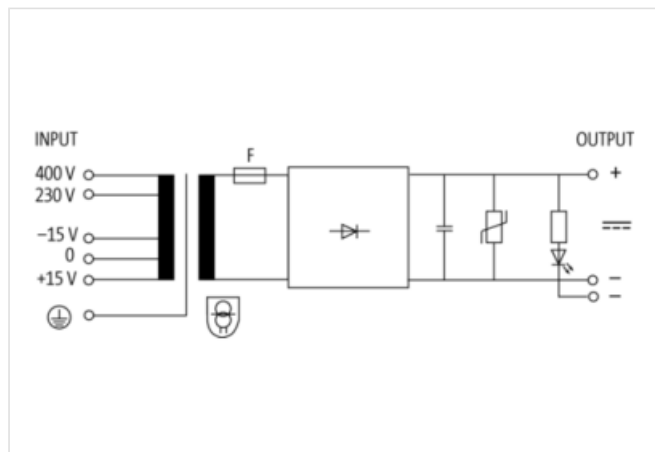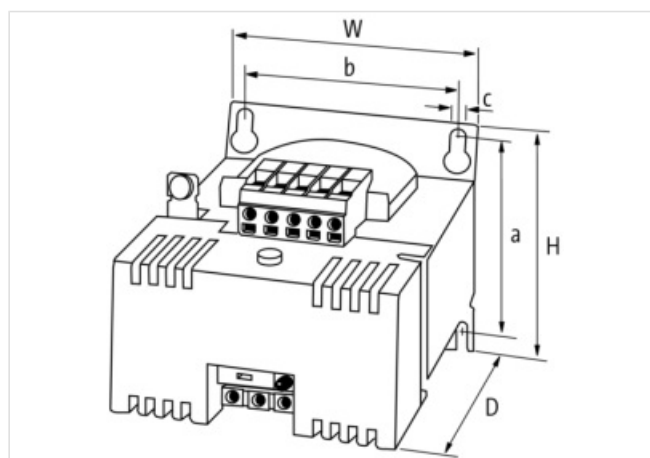

Produkten kan skilja sig från bilden



#### Kommersiella uppgifter

URL Webshop	<a href="https://shop.murrelektronik.com/8985350">https://shop.murrelektronik.com/8985350</a>
GTIN	4048879065740
Customs tariff number	85044095
ECLASS-6.0	27049002

ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-7.1	27049002
ECLASS-8.0	27049002
ECLASS-8.1	27049002
ECLASS-9.0	27040701
ECLASS-9.1	27040701
ECLASS-10.0.1	27040701
ECLASS-10.1	27040701
ECLASS-11.0	27040701
ECLASS-11.1	27040701
ECLASS-12.0	27040701
ECLASS-13.0	27040701
ECLASS-14.0	27040701
ETIM-5.0	EC002540
ETIM-6.0	EC002540
ETIM-7.0	EC002540
ETIM-8.0	EC002540
EAN	4048879065740
Förpackningsenhet	1
Kundens tullnummer	85044095

**Electrical data | Supply**

Protective measure	SELV
Power frequency	50 ... 60 Hz

**Electrical data | Input**

Nominal input voltage AC	230 V ... 400 V
Input voltage 1 AC min.	195,5 V
Input voltage 1 AC max.	264,5 V
Input voltage 2 AC min.	340 V
Input voltage 2 AC max.	460 V
Nominal current AC	0.5 A @ 230 V, 0.28 A @ 400 V
Characteristic back-up fuse	Inertia
Fuse protection 1 primary side external	0.8 A @ 230 V AC
Fuse protection 2 primary side external	5 A @ 400 V AC

**Electrical data | Output**

Output voltage adjustable	No
Output voltage DC	24 V
Output current max.	0.8 A @ 230 V AC
Output current max.	3 A
Utgångsfilter	VDR, LED
Type of secondary fuse	Flat fuse FKS
Fuse protection secondary side external	7,5 A
Ripple max.	5 %

**Mechanical data | Mounting data**

Height	83 mm
Width	84 mm
Depth	124 mm
Monteringsmetod	geschnappt
Suitable for mounting type	(EN 60715), Keyhole mounting, Mounting rail TH35-15
Mounting dimension a	65,5 mm
Mounting dimension b	64 mm
Mounting dimension c	4,8 mm

**Environmental characteristics | Electromagnetic compatibility**

Interference emission	EN IEC 55011, IEC 61000-3-2
-----------------------	-----------------------------

#### Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Derating	40 °C

#### Conformity

Product standard	EN IEC 61558-2-6
------------------	------------------

#### Connection type 3

Family construction form	terminal
Antal poler	1
Gender	female
Color contact carrier	metallic
Anslutning	Screw terminals SK
PIN 1	PE
Family construction form	terminal
Antal poler	3
Gender	female
Color contact carrier	grön
Anslutning	Screw terminals SK
PIN 1	+
PIN 2	-
PIN 3	-
Family construction form	terminal
Antal poler	5
Gender	female
Color contact carrier	grön
Anslutning	Screw terminals SK
PIN 1	+ 15 V
PIN 3	- 15 V
PIN 4	230 V
PIN 5	400 V