

### Cable drum Ø 355mm

PVC 4x0.34 shielded gy 100m

Art.Nr.: 7000-C0201-3300000

Vikt: 5,604 kg

Tillverknings land: DE

Modellbeteckning: 100m Kabel 50080897(330)gesch.Kabeltromm



Kabeltrumma (100 m)

PVC

4 × 0.34 mm<sup>2</sup>, grå

### Länk till produkt

#### Illustration

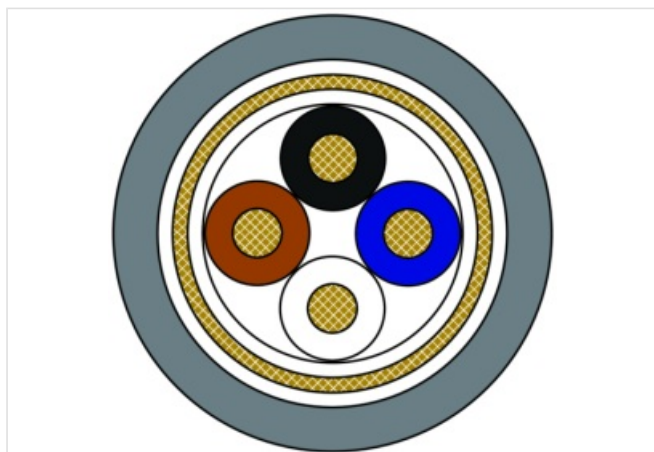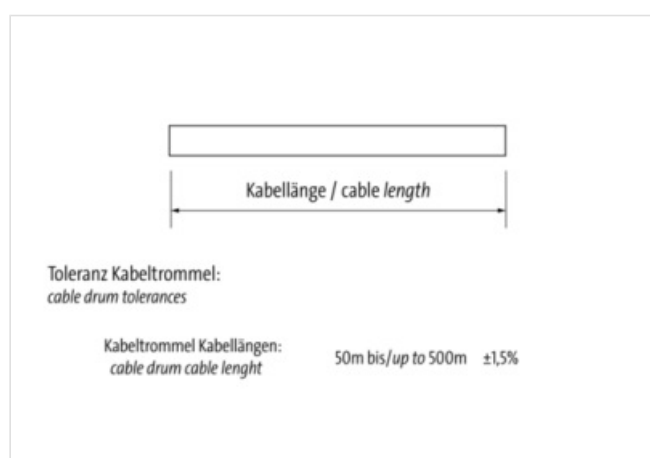

Produkten kan skilja sig från bilden

#### Kommersiella uppgifter

URL Webshop	<a href="https://shop.murrelektronik.com/7000-C0201-3300000">https://shop.murrelektronik.com/7000-C0201-3300000</a>
GTIN	4048879340670
Customs tariff number	85444995
ECLASS-6.0	27062011
ECLASS-6.1	27061801
ECLASS-7.0	27061801
ECLASS-7.1	27061801
ECLASS-8.0	27061801

ECLASS-8.1	27061801
ECLASS-9.0	27061801
ECLASS-9.1	27061801
ECLASS-10.0.1	27061801
ECLASS-10.1	27061801
ECLASS-11.0	27061801
ECLASS-11.1	27061801
ECLASS-12.0	27061801
ECLASS-13.0	27061801
ECLASS-14.0	27061801
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
EAN	4048879340670
Förpackningsenhet	1
Kundens tullnummer	85444995

**Mechanical data | Mounting data**

Kabellängd	100 m
------------	-------

**Important installation notes**

Note on bending radius	<b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

**Installation | Cable**

Cable identification	330
Stranding	1 × 4 wires stranded
Stranding factor min.	74 mm
Stranding factor max.	74 mm
Cable shielding (type)	copper braid, tinned
Cable shielding (coverage)	85 %
Banding	Fleece, Foil
Wire arrangement	brown, black, blue, white
Cable weight	49 g/m
Material wire insulation	PVC
Amount wires	4
Outer diameter insulation	1,5 mm
Outer diameter tolerance core insulation	± 0,2 mm
Shore hardness wire insulation	85 ± 3 Shore A
Ingredient freeness wire insulation	lead-free, cadmium-free, CFC-free
Amount strands (wire)	42
Diameter of single wires	0,1 mm
Conductor crosssection (wire)	0,34 mm <sup>2</sup>
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	strand class 6
Outer-diameter (jacket)	5,9 mm
Tolerance outer diameter (sheath)	± 5 %
Material mantel	PVC
Durezza rivestimento	85 ± 3 Shore A
Freedom from ingredients (jacket)	lead-free, cadmium-free, CFC-free
Material property (jacket)	abrasion-resistant, low adhesion, good machinability
Conductor resistance (wire)	57 Ω/km @ 20 °C
Max. rated voltage (conductor - ground)	300 V
Max. rated voltage (conductor - conductor)	500 V

Withstand voltage (wire - wire)	1.5 kV @ 60 s
Withstand voltage (wire - jacket)	1.5 kV @ 60 s
Withstand voltage (wire - shield)	1.5 kV @ 60 s
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity max. (wire)	4,8 A
Operating temperature min. (static)	-30 °C
Operating temperature max. (static)	80 °C
Operating temperature min. (dynamic)	-5 °C
Operating temperature max. (dynamic)	70 °C
Oil resistance	good
Chemical resistance	good
Other resistances	good resistance to gasoline
Böjradie (fixerad)	5 × Outer diameter
Böjradie (vid rörelse)	15 × Outer diameter