MURR ELEKTRONIK
stay connected

UNIVERSAL CONTACTOR SUPPRESSOR

RC, 230VAC/DC/75VA/W

230 V AC/DC
RC
For other configurations and voltages, please inquire.

Länk till produkt

Illustration

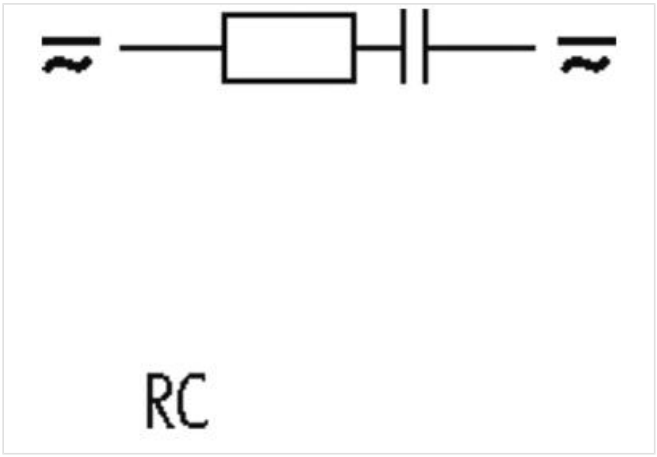

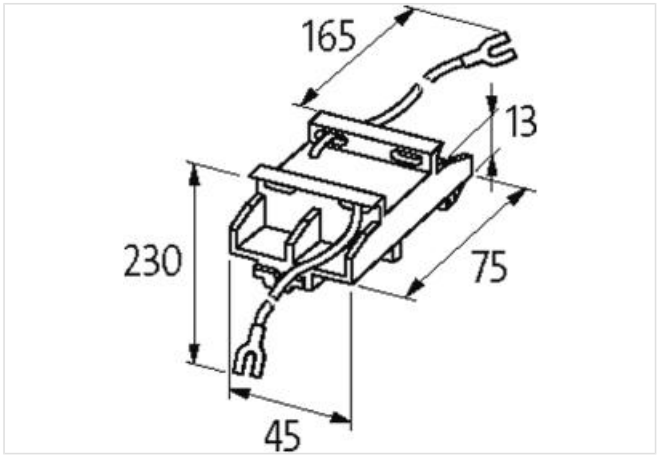

Produkten kan skilja sig från bilden

Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013
ECLASS-11.1	27371013

MURR ELEKTRONIK
stay connected

ECLASS-12.0	27371013
ETIM-5.0	EC002498
Förpackningsenhet	1
GTIN	4048879020435
Kundens tullnummer	85363010
Compatibility | Compatible with	
Appropriate contactors	universal
Electrical data	
Damping factor	1.5× UN
Holding power max.	75 W
Electrical data | Input	
Input voltage AC min.	110 V
Input voltage AC max.	253 V
Input voltage DC min.	110 V
Input voltage DC max.	253 V
Installation | Connection	
Connection information	self-securing cable forks
Device protection | Media	
Flame resistance	flame retardant
Mechanical data | Material data	
Combustibility class housing (UL94)	V-0
Material housing	Plastic
Mechanical data | Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	45 mm
Width	75 mm
Depth	13 mm
Environmental characteristics | Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	70 °C