


MOTOR SUPPRESSOR

RC, 3x400VAC/20kW


3× 400 V AC

RC single

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

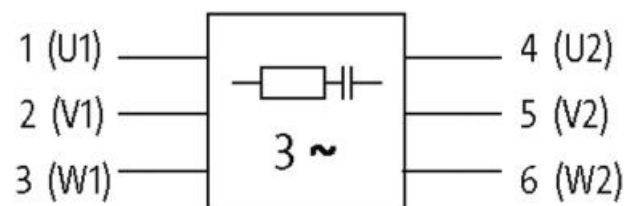[Länk till produkt](#)**Illustration**

RC-(1) per phase

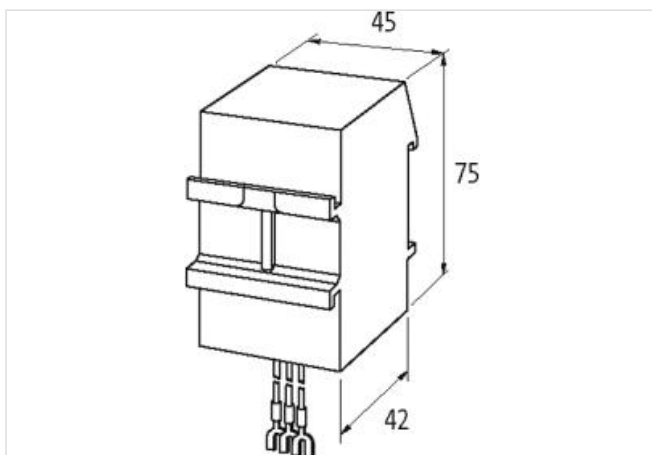

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
-------------	----------

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC000197
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879019583
------	---------------

Kundens tullnummer	85363010
--------------------	----------

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	400 V
------------------	-------

Installation

Connection cross-section stranded/fine-stranded min.	0,5 mm ²
--	---------------------

Installation | Connection

Connection information	Einzellitzen mit selbstsicherndem Gabelkabelschuh M4
------------------------	--

Length single strands	250 mm
-----------------------	--------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Material potting compound	2-component epoxy
---------------------------	-------------------

Mechanical data | Mounting data

Height	75 mm
--------	-------

Width	45 mm
-------	-------

Depth	42 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------