

MOTOR SUPPRESSOR

Varistor, 3x575VAC/10kW



3 × 575 V AC

VDR

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Länk till produkt

Illustration

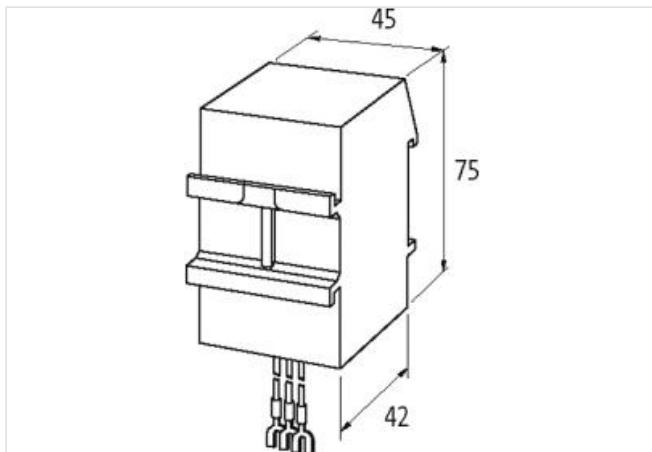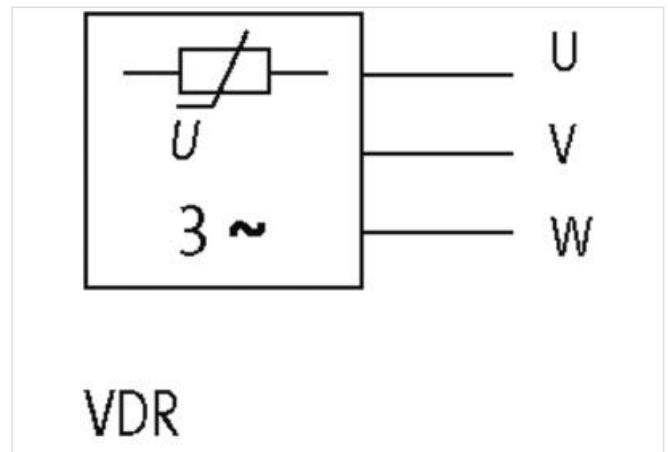

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
-------------	----------

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC000197
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879019545
------	---------------

Kundens tullnummer	85363010
--------------------	----------

Electrical data | Supply

Power frequency	10 ... 400 Hz
-----------------	---------------

Electrical data | Input

Input voltage AC	575 V
------------------	-------

Installation

Connection cross-section stranded/fine-stranded min.	0,5 mm ²
--	---------------------

Installation | Connection

Connection information	Einzellitzen mit selbstsicherndem Gabelkabelschuh M4
------------------------	--

Length single strands	250 mm
-----------------------	--------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Material potting compound	2-component epoxy
---------------------------	-------------------

Mechanical data | Mounting data

Height	75 mm
--------	-------

Width	45 mm
-------	-------

Depth	42 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------