

MOTOR SUPPRESSOR

RC, 3x575VAC/5,5kW



3 × 575 V AC

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Länk till produkt

Illustration

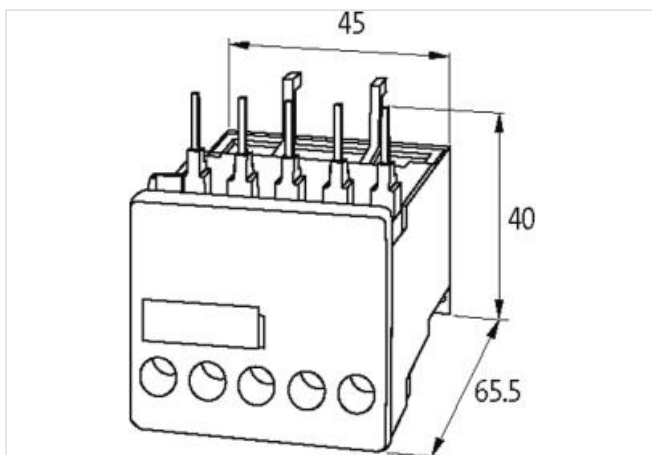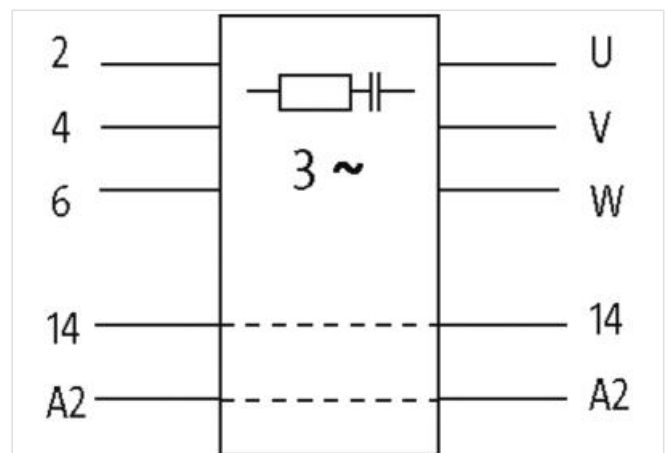

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
-------------	----------

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC000197
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879018869
------	---------------

Kundens tullnummer	85363010
--------------------	----------

Compatibility | Compatible with

Appropriate contactors	3 RT 20, Siemens 3 RT 10
------------------------	--------------------------

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	575 V
------------------	-------

Installation | Connection

Connection information	fits directly into SIRIUS contactors, size 00
------------------------	---

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Height	40 mm
--------	-------

Width	45 mm
-------	-------

Depth	65,5 mm
-------	---------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------