
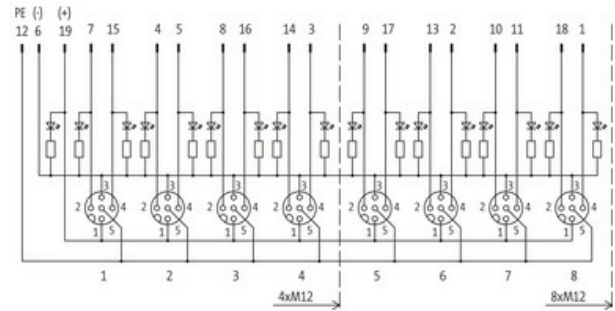
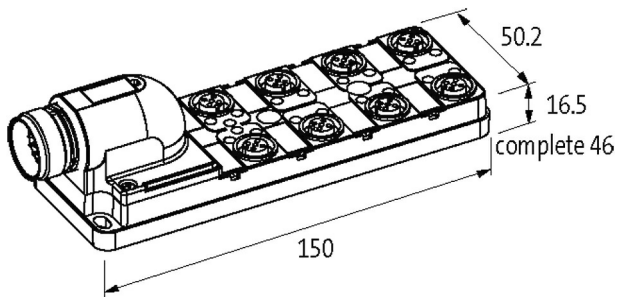


**MVP12, 8XM12, 5POLE, M23 19POL. CON.**



Connector exit 90°

[Länk till produkt](#)**Illustration**

M12-Females 5-pole



M23-Plug 19-pole



Produkten kan skilja sig från bilden

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm)
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 7.5 A

**General data**

Temperature range	-20...+80 °C
Dimensions H×W×D	150×50.2×17 mm

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)

PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1/S2)
<b>Kommersiella uppgifter</b>	
EAN	4048879063180
eClass	27279219
Förpackningsenhet	1.000
Kundens tullnummer	85369010
Tillverknings land	DE