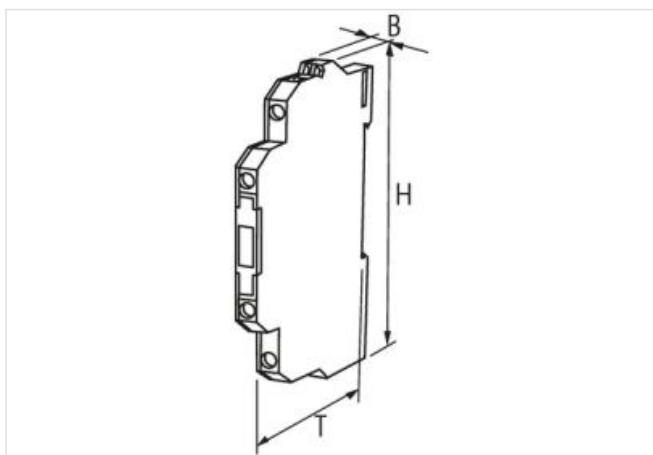
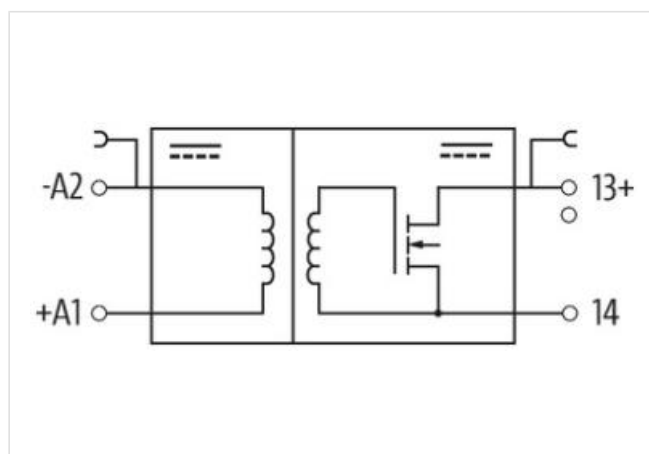


**INDUCTIVCOUPLER 24V 5A 30KHZ**

Inductive switching signal transmission  
 Wear-free switching  
 No operating voltage at output  
 Switching frequency: max. 30 kHz  
 Switching current up to 5 A  
 Screw terminals

[Länk till produkt](#)**Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27371604 |
| ECLASS-6.1  | 27379090 |
| ECLASS-7.0  | 27379090 |
| ECLASS-8.0  | 27379090 |
| ECLASS-9.0  | 27379090 |
| ECLASS-10.1 | 27379090 |

|                                                 |                           |
|-------------------------------------------------|---------------------------|
| ECLASS-11.1                                     | 27379090                  |
| ECLASS-12.0                                     | 27379090                  |
| ETIM-5.0                                        | EC001504                  |
| Förpackningsenhet                               | 1                         |
| GTIN                                            | 4048879329538             |
| Kundens tullnummer                              | 85365080                  |
| <b>Electrical data   Input</b>                  |                           |
| Input voltage OFF DC min.                       | 0 V                       |
| Input voltage OFF DC max.                       | 5 V                       |
| Input voltage DC                                | 24 V                      |
| Input voltage DC min.                           | 15 V                      |
| Input voltage DC max.                           | 30 V                      |
| Input current DC max.                           | 32 mA                     |
| <b>Electrical data   Output</b>                 |                           |
| Quiescent current OFF max.                      | 0,025 mA                  |
| Switching frequency inductive max.              | 3000 Hz                   |
| Switching frequency ohmic max.                  | 30000 Hz                  |
| Switching current min.                          | 1 mA                      |
| Switching current max.                          | 5 A                       |
| <b>Diagnostics</b>                              |                           |
| Status indication LED                           | yellow                    |
| <b>Device protection   Electrical</b>           |                           |
| Degree of protection (EN IEC 60529)             | IP20                      |
| Rated surge voltage                             | 1,5 kV                    |
| <b>Device protection   Media</b>                |                           |
| Flame resistance                                | flame retardant           |
| <b>Mechanical data   Material data</b>          |                           |
| Color housing                                   | black                     |
| Material housing                                | Plastic                   |
| <b>Mechanical data   Mounting data</b>          |                           |
| Mounting method                                 | geschnappt                |
| Suitable for mounting type                      | mounting rail, (EN 60715) |
| Height                                          | 78 mm                     |
| Width                                           | 6,2 mm                    |
| Depth                                           | 71 mm                     |
| <b>Environmental characteristics   Climatic</b> |                           |
| Operating temperature min.                      | -20 °C                    |
| Operating temperature max.                      | 60 °C                     |
| Storage temperature min.                        | -40 °C                    |
| Storage temperature max.                        | 80 °C                     |