



## MASI20 INSTALLATION TECHNOLOGY

Distributor 2x AS-I and 3x extern power

2 AS-Interface + 3 power ports  
potentially separated  
5 plug terminals included

### [Länk till produkt](#)

#### Illustration

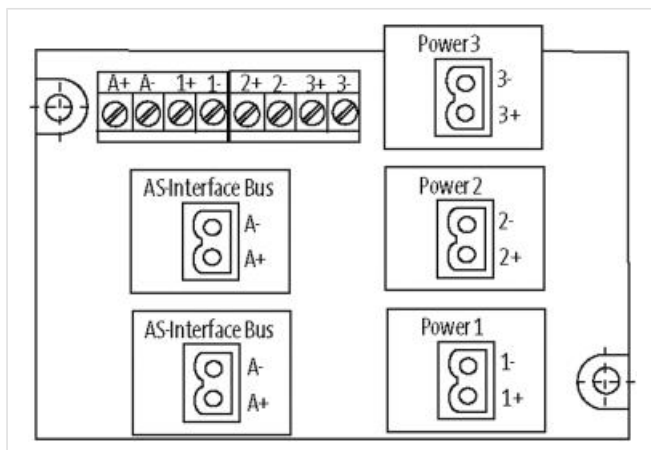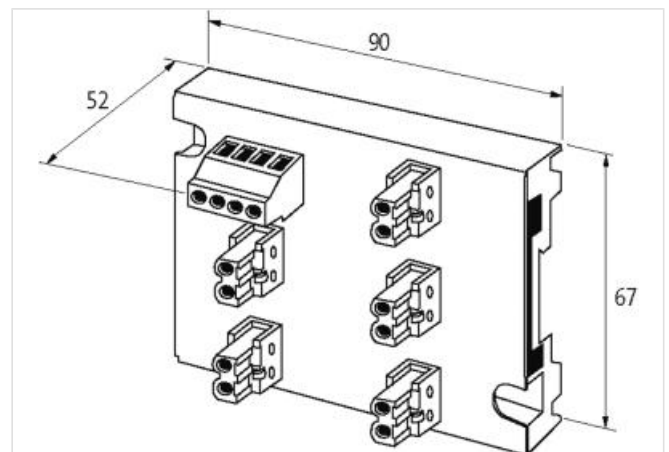

Produkten kan skilja sig från bilden



#### Kommersiella uppgifter

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27279219 |
| ECLASS-6.1  | 27279219 |
| ECLASS-7.0  | 27279219 |
| ECLASS-8.0  | 27279219 |
| ECLASS-9.0  | 27440108 |
| ECLASS-10.1 | 27440111 |
| ECLASS-11.1 | 27440111 |

|                                                 |                           |
|-------------------------------------------------|---------------------------|
| ECLASS-12.0                                     | 27440111                  |
| ETIM-5.0                                        | EC001596                  |
| Förpackningsenhet                               | 1                         |
| GTIN                                            | 4048879050593             |
| Kundens tullnummer                              | 85176200                  |
| <b>Electrical data   Supply</b>                 |                           |
| Operating voltage DC max.                       | 36 V                      |
| Current operating per port max.                 | 8 A                       |
| Total current max.                              | 24 A                      |
| <b>Device protection   Electrical</b>           |                           |
| Degree of protection (EN IEC 60529)             | IP20                      |
| Insulation strength ASI/Power                   | 200 V                     |
| <b>Mechanical data   Mounting data</b>          |                           |
| Mounting method                                 | geschnappt                |
| Suitable for mounting type                      | mounting rail, (EN 60715) |
| Height                                          | 52 mm                     |
| Width                                           | 67 mm                     |
| Depth                                           | 90 mm                     |
| <b>Environmental characteristics   Climatic</b> |                           |
| Operating temperature min.                      | -20 °C                    |
| Operating temperature max.                      | 70 °C                     |
| Storage temperature min.                        | -40 °C                    |
| Storage temperature max.                        | 80 °C                     |
| <b>Conformity</b>                               |                           |
| Product standard                                | EN 60664-1                |
| <b>Connection type 5</b>                        |                           |
| Connection type 1                               | Asi Bus                   |
| Connection type 2                               | Power 1                   |
| Connection type 3                               | Power 2                   |
| Connection type 4                               | Power 3                   |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 2                         |
| PIN 1                                           | A +                       |
| PIN 2                                           | A -                       |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 2                         |
| PIN 1                                           | 1 +                       |
| PIN 2                                           | 1 -                       |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 2                         |
| PIN 1                                           | 2 +                       |
| PIN 2                                           | 2 -                       |

|                          |                    |
|--------------------------|--------------------|
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | 3 +                |
| PIN 2                    | 3 -                |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 8                  |
| PIN 1                    | A +                |
| PIN 2                    | A -                |
| PIN 3                    | 1 +                |
| PIN 4                    | 1 -                |
| PIN 5                    | 2 +                |
| PIN 6                    | 2 -                |
| PIN 7                    | 3 +                |
| PIN 8                    | 3 -                |