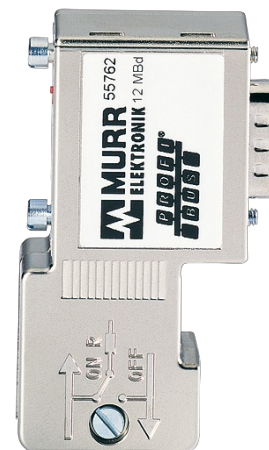


PROFIBUS-PLUG-MALE (SUB-D) 90°

Screw terminals up to 12Mbits/s

[Länk till produkt](#)**Illustration**

Produkten kan skilja sig från bilden

Technical Data

Operating voltage	4.75...5.25 V DC (via the fieldbus device)
Terminating resistor	integrated, switchable
Current consumption	max. 12.5 mA
Transfer rate	max. 12 Mbit/s

General data

Protection	IP20
Dimensions H×W×D	64×40×17 mm
Temperature range	0...+60 °C (storage temperature -25...+80 °C)

Kommersiella uppgifter

EAN	4048879049818
eClass	27279221
Förpackningsenhet	1
Kundens tullnummer	85366990
Tillverknings land	DE