

CUBE67 BUS NODES

Ethernet/IP

EtherNet/IP



Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

[Länk till produkt](#)

Illustration



Produkten kan skilja sig från bilden

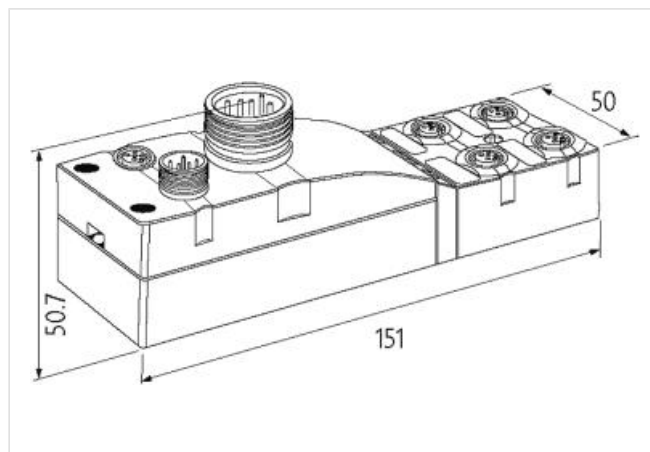

Kommersiella uppgifter

ECLASS-6.0	27242608
Förpackningsenhet	1
GTIN	4048879048705
Kundens tullnummer	85389099

Electrical data | Supply

Operating voltage DC	24 V
Current consumption max.	70 mA
Total current UA max.	9 A
Total current US max.	9 A

Industrial communication | Ethernet/IP

EtherNet/IP addressing	BOOTP, DHCP, Rotary switch
------------------------	----------------------------

Diagnostics

Diagnostic	No voltage, Under voltage
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
Short circuit diagnosis	yes
LED display	Ethernet connection/data traffic
Overload diagnosis	yes

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Mechanical data

Number extension modules max.	16
-------------------------------	----

Mechanical data | Mounting data

Suitable for mounting type	2-hole screw mounting
Height	151 mm
Width	50 mm
Depth	50,3 mm

Environmental characteristics | Climatic

Operating temperature min.	0 °C
Operating temperature max.	55 °C
Storage temperature min.	-20 °C
Storage temperature max.	75 °C

Conformity

Product standard	EN 61131-2
------------------	------------

Connection type 3

Connection type 1	Bus In
Connection type 2	Internal system connection
Connection type 3	Power
Mounting method	inserted, screwed
Tightening torque	0,6 Nm
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	D
No. of poles	4
PIN 1	TD +
PIN 2	RD +
PIN 3	TD -
PIN 4	RD -
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	6
PIN 1	24 V DC (UA)
PIN 2	24 V DC (US)
PIN 3	0 V
PIN 4	Bus internal
PIN 5	Bus internal
PIN 6	0 V
Family construction form	7/8"
Gender	male
Color contact carrier	black
No. of poles	5
PIN 1	0 V
PIN 2	0 V
PIN 3	PE
PIN 4	24 V DC (US)
PIN 5	24 V DC (UA)