

## CUBE20S POTENTIAL DISTRIBUTORS

4 x 24 V DC + 4 x 0 V DC


Potential distributor  
Expansion module  
4x 24 V DC

### Länk till produkt

#### Illustration



Produkten kan skilja sig från bilden

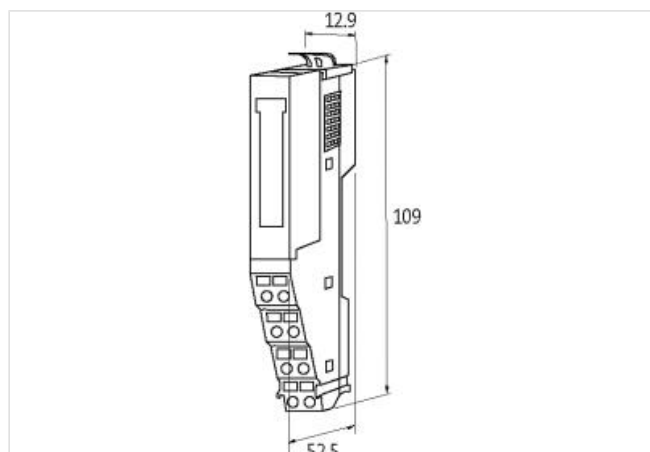

#### Kommersiella uppgifter

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27379201      |
| ECLASS-6.1         | 27242611      |
| ECLASS-7.0         | 27242611      |
| ECLASS-8.0         | 27242611      |
| ECLASS-9.0         | 27242611      |
| ECLASS-10.1        | 27242611      |
| ECLASS-11.1        | 27242611      |
| ECLASS-12.0        | 27242611      |
| ETIM-5.0           | EC001600      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879422871 |
| Kundens tullnummer | 85369010      |

#### Electrical data | Supply

|                           |      |
|---------------------------|------|
| Operating voltage DC max. | 30 V |
| Total current max.        | 10 A |

#### Device protection | Electrical

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP20 |
|-------------------------------------|------|

#### Mechanical data | Mounting data

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 109 mm                    |

|       |         |
|-------|---------|
| Width | 12,9 mm |
| Depth | 52,5 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | 0 °C   |
| Operating temperature max. | 60 °C  |
| Storage temperature min.   | -25 °C |
| Storage temperature max.   | 70 °C  |

**Connection type 2**

|                          |                           |
|--------------------------|---------------------------|
| Connection type 1        | Power                     |
| Connection type 2        | Power                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| No. of poles             | 8                         |
| PIN 1                    | n.c.                      |
| PIN 2                    | 24 V DC                   |
| PIN 3                    | 0 V                       |
| PIN 4                    | 24 V DC Sys               |
| PIN 5                    | n.c.                      |
| PIN 6                    | 24 V DC                   |
| PIN 7                    | 0 V                       |
| PIN 8                    | 0 V Sys                   |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| No. of poles             | 8                         |
| PIN 1                    | 24 V DC                   |
| PIN 2                    | 24 V DC                   |
| PIN 3                    | 24 V DC                   |
| PIN 4                    | 24 V DC                   |
| PIN 5                    | 0 V DC                    |
| PIN 6                    | 0 V DC                    |
| PIN 7                    | 0 V DC                    |
| PIN 8                    | 0 V DC                    |