

## TREE 8TX Eco Gigabit Unmanaged Switch

8 port Gigabit unmanaged Switch


Connection cables are in the online shop under "Connection Technology".

### [Länk till produkt](#)

#### Illustration



Produkten kan skilja sig från bilden

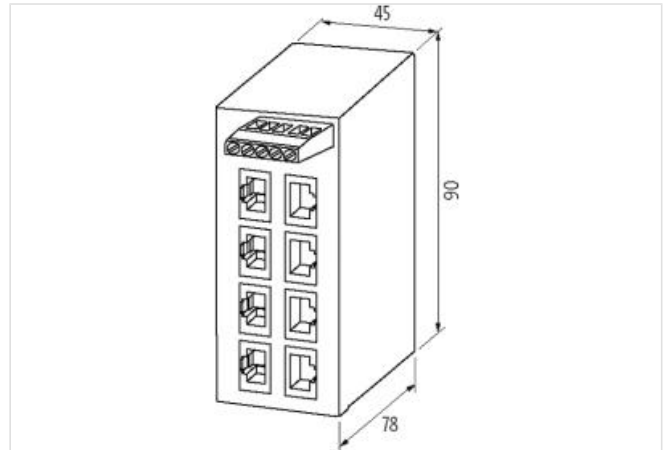

#### Kommersiella uppgifter

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 19170106      |
| ECLASS-6.1         | 19170106      |
| ECLASS-7.0         | 19170106      |
| ECLASS-8.0         | 19170106      |
| ECLASS-9.0         | 19170402      |
| ECLASS-10.1        | 19170402      |
| ECLASS-11.1        | 19170402      |
| ECLASS-12.0        | 19170402      |
| ETIM-5.0           | EC000734      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879797474 |
| Kundens tullnummer | 85176200      |

#### Electrical data | Supply

|                           |        |
|---------------------------|--------|
| Operating voltage DC min. | 9 V    |
| Operating voltage DC max. | 30 V   |
| Current consumption max.  | 450 mA |

#### Industrial communication

|                             |             |
|-----------------------------|-------------|
| Data transmission rate max. | 1000 MBit/s |
|-----------------------------|-------------|

#### Industrial communication | Ethernet functionality

|                  |             |
|------------------|-------------|
| Auto-crossover   | yes         |
| Auto-negotiation | yes         |
| duplex           | Full duplex |
| Switch type      | unmanaged   |

VLAN unmanaged (IEEE 802.1Q)      yes

#### Diagnostics

Alarm contact      no

Diagnostic      No voltage

LED display      Ethernet connection/data traffic

#### Device protection | Electrical

Degree of protection (EN IEC 60529)      IP20

Invers-polarity protection      yes

Over voltage protection      yes

#### Mechanical data | Material data

Color housing      black

Material housing      Plastic

#### Mechanical data | Mounting data

Mounting method      geschnappt

Suitable for mounting type      Mounting rail TH35, (EN 60715)

Height      90 mm

Width      45,2 mm

Depth      78 mm

#### Environmental characteristics | Climatic

Operating temperature min.      0 °C

Operating temperature max.      60 °C

Storage temperature min.      -10 °C

Storage temperature max.      70 °C

#### Connection type 2

Connection type 1      8

Connection type 2      X1

Family construction form      RJ45

Gender      female

Color contact carrier      black

No. of poles      8

PIN 1      TD +

PIN 2      TD -

PIN 3      RD +

PIN 4      n.c.

PIN 5      n.c.

PIN 6      RD -

PIN 7      n.c.

PIN 8      n.c.

Connection      Plug-in terminals RK

Family construction form      terminal

Gender      male

Color contact carrier      green

No. of poles      5

PIN 1      FE

PIN 2      0 V

PIN 3      24 V DC (UB 1)

PIN 4      0 V

PIN 5      24 V DC (UB 2)