

TREE PROFINET managed Switch 5x10/100BT IP67 plastic M12




5 ports

PROFINET - Managed Switch

Connection cables are in the online shop under "Connection Technology".

Länk till produkt

Illustration

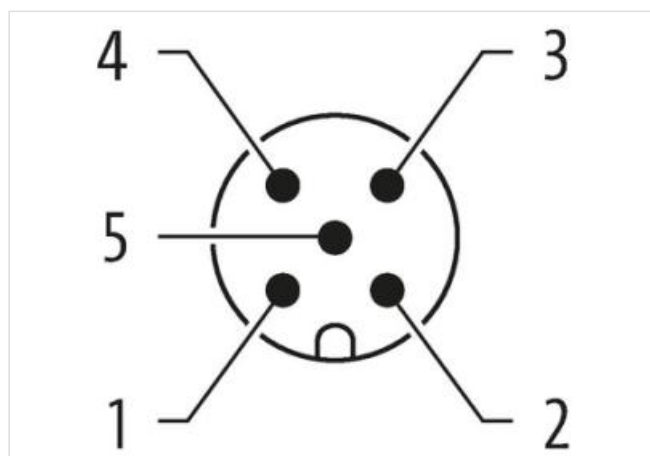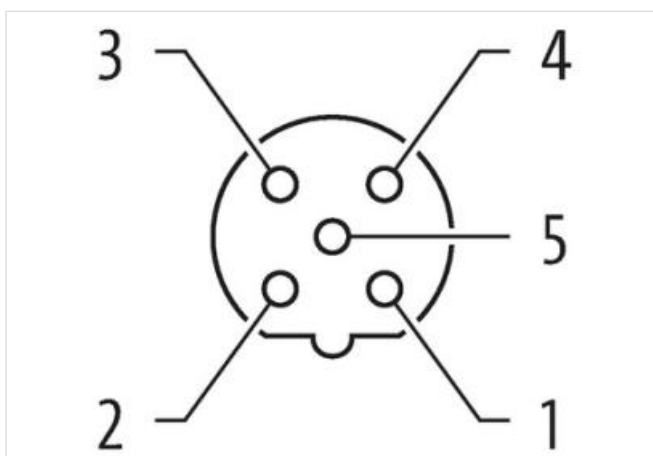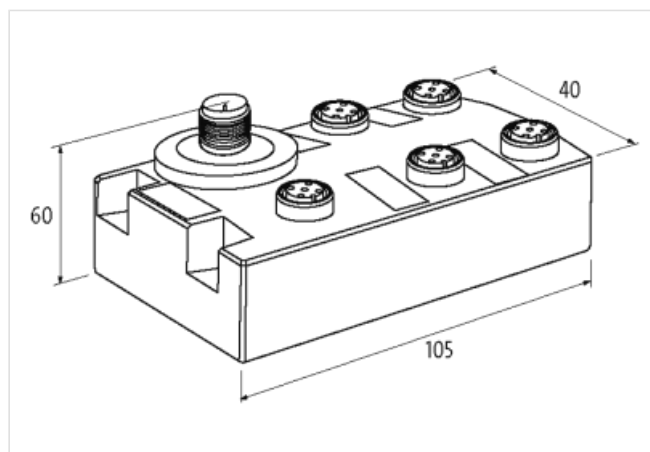

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	19170106
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-8.0	19170106
ECLASS-9.0	19170401
ECLASS-10.1	19170401
ECLASS-11.1	19170401
ECLASS-12.0	19170401

ETIM-5.0	EC000734
Förpackningsenhet	1
GTIN	4048879720311
Kundens tullnummer	85176200

Electrical data | Supply

Operating voltage DC min.	9,5 V
Operating voltage DC max.	31,5 V
Current consumption min.	97,5 mA
Current consumption max.	162,5 mA

Industrial communication

Supported protocol	PROFINET
Data transmission rate max.	100 MBit/s

Industrial communication | Ethernet functionality

Auto-crossover	yes
Auto-negotiation	yes
duplex	Full duplex
LLDP frames	forwarding
Ring topology	RSTP, MRP, STP
Switch type	managed

Industrial communication | Profinet

FSU (Fast-Start-Up)	no
MRP client	yes
PROFINET Netload Class	I
PROFINET addressing	DCP
PROFINET conformance class	B
PROFINET specification	V2.3
Shared device/input	no

Industrial communication | IIoT functions

Webserver	HTTP, HTTPS
-----------	-------------

Switch Management

Addressing	BOOTP/DHCP client, DCP, SSH-Befehlszeile
RSTP (IEEE 802.1D-2004, IEC 62439-1)	Default on
Simple Network Management Protocol (SNMP)	v1 + v2c + v3 (default active)
VLAN managed (IEEE 802.1Q)	no
Time synchronization	Real-time clock, NTP client

Diagnostics

Alarm contact	no
Diagnostic	No voltage
Remote maintenance	Open VPN client
LED display	Ethernet connection/data traffic
Port mirroring	1:1
RMON	yes
SNMP traps	yes
Syslog	yes

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Mechanical data | Material data

Color housing	black
Material housing	Plastic

Mechanical data | Mounting data

Suitable for mounting type	3 hole screw mounting
----------------------------	-----------------------

Height	105 mm
--------	--------

Width	60 mm
-------	-------

Depth	40 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	0 °C
----------------------------	------

Operating temperature max.	60 °C
----------------------------	-------

Storage temperature min.	-40 °C
--------------------------	--------

Storage temperature max.	85 °C
--------------------------	-------

Connection type 2

Connection type 1	4, 5
-------------------	------

Mounting method	inserted, screwed
-----------------	-------------------

Tightening torque	0,6 Nm
-------------------	--------

Family construction form	M12
--------------------------	-----

Gender	female
--------	--------

Color contact carrier	black
-----------------------	-------

Coding	D
--------	---

No. of poles	4
--------------	---

PIN 1	TD +
-------	------

PIN 2	RD +
-------	------

PIN 3	TD -
-------	------

PIN 4	RD -
-------	------

Family construction form	M12
--------------------------	-----

Gender	male
--------	------

Color contact carrier	black
-----------------------	-------

Coding	A
--------	---

No. of poles	5
--------------	---

PIN 1	24 V DC (UB 1)
-------	----------------

PIN 2	RD
-------	----

PIN 3	0 V
-------	-----

PIN 4	TD
-------	----

PIN 5	n.c.
-------	------