

**EUROCARD HOLDER**

SKT 31

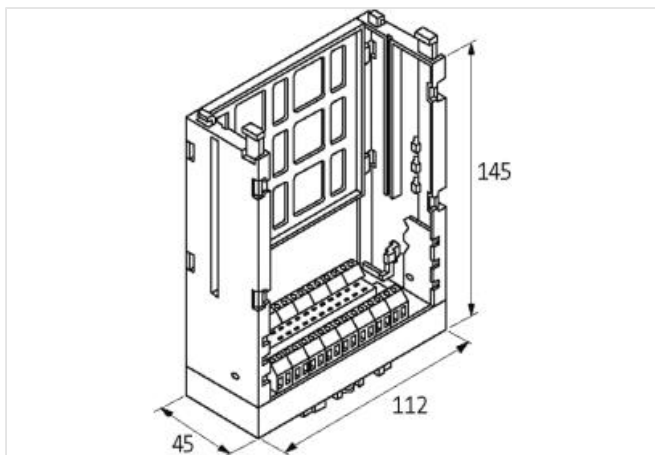
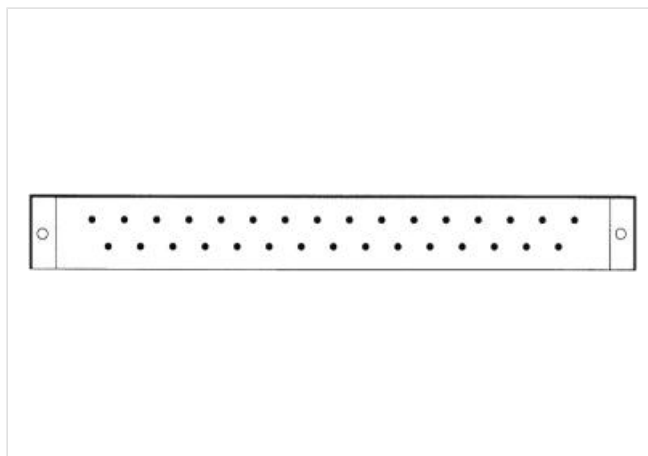
Screw terminals

31-pole (DIN 41617)

all

The D2 size is for a card without a front plate.

To insert the card first press down the 2 yellow buttons. Then slide the Eurocard into the guide slots pushing until fully engaged. The card is now locked into position. It can be removed by pressing down on the 2 yellow buttons.

**Länk till produkt****Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27260710 |
| ECLASS-6.1 | 27260704 |
| ECLASS-7.0 | 27440402 |
| ECLASS-8.0 | 27440402 |

|                    |               |
|--------------------|---------------|
| ECLASS-9.0         | 27460201      |
| ECLASS-10.1        | 27440402      |
| ECLASS-11.1        | 27460201      |
| ECLASS-12.0        | 27460201      |
| ETIM-5.0           | EC002780      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879042024 |
| Kundens tullnummer | 85366990      |

**Electrical data | Supply**

|                        |       |
|------------------------|-------|
| Operating voltage AC   | 250 V |
| Operating current max. | 5 A   |

**Installation**

|                                     |                   |
|-------------------------------------|-------------------|
| Connection cross-section solid max. | 4 mm <sup>2</sup> |
|-------------------------------------|-------------------|

**Installation | Pin assignment**

|              |    |
|--------------|----|
| No. of poles | 31 |
|--------------|----|

**Device protection | Electrical**

|                                   |   |
|-----------------------------------|---|
| Overvoltage category (EN 60664-1) | I |
|-----------------------------------|---|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data**

|                          |           |
|--------------------------|-----------|
| Type of socket connector | DIN 41617 |
|--------------------------|-----------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Mechanical data | Mounting data**

|                            |                                                 |
|----------------------------|-------------------------------------------------|
| Mounting method            | screwed, geschnappt                             |
| Suitable for mounting type | horizontal, vertical, mounting rail, (EN 60715) |
| Height                     | 112 mm                                          |
| Width                      | 45 mm                                           |
| Depth                      | 145 mm                                          |