

MSVD POWER SOCKET NEMA (GFCI)

Mounting rail

USA (2× NEMA-GFCI 5-15)

(Ground Fault Circuit Interrupter)

Screw terminals


Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

Länk till produkt

Illustration



Produkten kan skilja sig från bilden

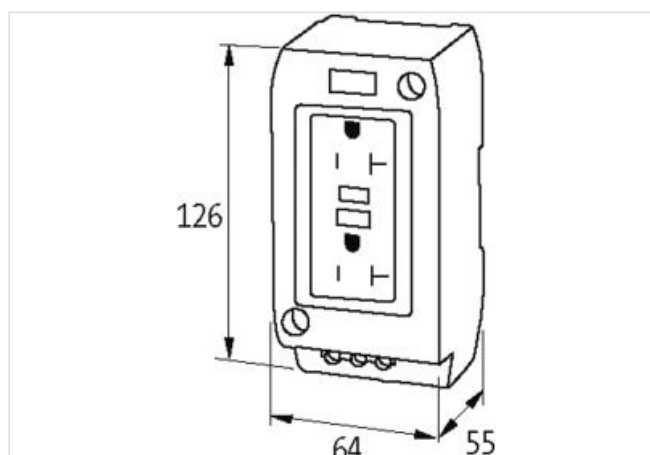

Kommersiella uppgifter

ECLASS-6.0	27189217
ECLASS-6.1	27142305
ECLASS-7.0	27142305
ECLASS-8.0	27142305
ECLASS-9.0	27142305
ECLASS-10.1	27142305
ECLASS-11.1	27142305
ECLASS-12.0	27142305
ETIM-5.0	EC000020
Förpackningsenhet	1
GTIN	4048879041393
Kundens tullnummer	85366990

Electrical data

Fault current min.	4 mA
Fault current max.	6 mA

Electrical data | Supply

Operating voltage AC	125 V
Operating current max.	15 A

Installation

Connection cross section max.	6 mm ²
-------------------------------	-------------------

Installation | Connection

Connection	Screw terminals SK
------------	--------------------

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	126 mm
Width	64 mm
Depth	55 mm