



## MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 5000VA IN: 400VAC+/- 5% OUT: 230VAC

Single-phase - Control and Isolation Transformers  
5000 VA  
Isolation class T 40/B

### [Länk till produkt](#)

#### Illustration

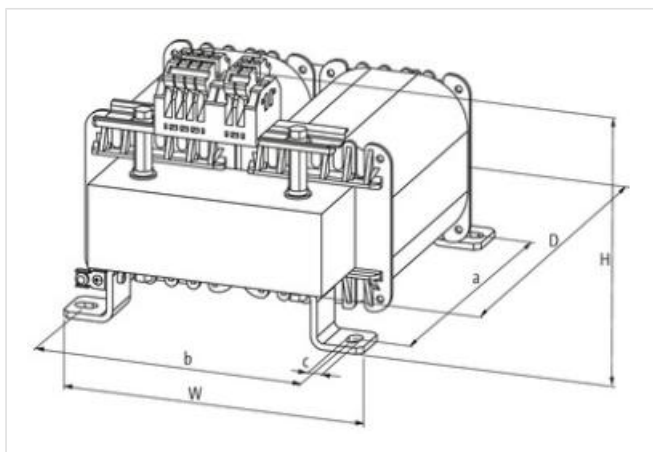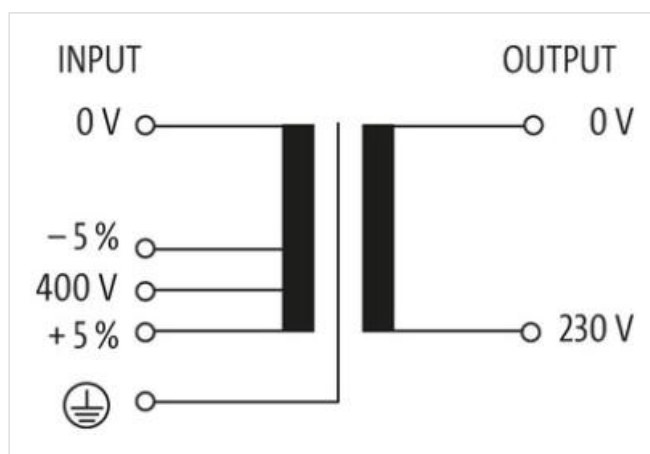

Produkten kan skilja sig från bilden



#### Kommersiella uppgifter

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27031302 |
| ECLASS-6.1  | 27031302 |
| ECLASS-7.0  | 27031302 |
| ECLASS-8.0  | 27031302 |
| ECLASS-9.0  | 27031302 |
| ECLASS-10.1 | 27031302 |
| ECLASS-11.1 | 27031302 |

|             |          |
|-------------|----------|
| ECLASS-12.0 | 27031302 |
|-------------|----------|

|          |          |
|----------|----------|
| ETIM-5.0 | EC002486 |
|----------|----------|

|                   |   |
|-------------------|---|
| Förpackningsenhet | 1 |
|-------------------|---|

|      |               |
|------|---------------|
| GTIN | 4048879078764 |
|------|---------------|

|                    |          |
|--------------------|----------|
| Kundens tullnummer | 85043200 |
|--------------------|----------|

#### Electrical data | Supply

|                 |              |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

#### Electrical data | Input

|                  |       |
|------------------|-------|
| Input voltage AC | 400 V |
|------------------|-------|

|                       |       |
|-----------------------|-------|
| Input voltage AC min. | 380 V |
|-----------------------|-------|

|                       |       |
|-----------------------|-------|
| Input voltage AC max. | 420 V |
|-----------------------|-------|

|                  |         |
|------------------|---------|
| Current input AC | 12,86 A |
|------------------|---------|

|                     |       |
|---------------------|-------|
| Max. inrush current | 399 A |
|---------------------|-------|

|                       |         |
|-----------------------|---------|
| Short-circuit current | 700,3 A |
|-----------------------|---------|

#### Electrical data | Output

|                   |       |
|-------------------|-------|
| Output voltage AC | 230 V |
|-------------------|-------|

|                           |    |
|---------------------------|----|
| Output voltage adjustable | no |
|---------------------------|----|

|                      |         |
|----------------------|---------|
| Power rating AC max. | 5000 VA |
|----------------------|---------|

#### Device protection | Electrical

|                                        |      |
|----------------------------------------|------|
| Insulation test voltage input - output | 4 kV |
|----------------------------------------|------|

#### Mechanical data | Mounting data

|                            |                    |
|----------------------------|--------------------|
| Suitable for mounting type | Long-hole mounting |
|----------------------------|--------------------|

|                      |        |
|----------------------|--------|
| Mounting dimension a | 200 mm |
|----------------------|--------|

|                      |        |
|----------------------|--------|
| Mounting dimension b | 174 mm |
|----------------------|--------|

|                      |      |
|----------------------|------|
| Mounting dimension c | 9 mm |
|----------------------|------|

|        |        |
|--------|--------|
| Height | 225 mm |
|--------|--------|

|       |        |
|-------|--------|
| Width | 198 mm |
|-------|--------|

|       |        |
|-------|--------|
| Depth | 250 mm |
|-------|--------|

|               |      |
|---------------|------|
| Diameter bore | 9 mm |
|---------------|------|

|             |       |
|-------------|-------|
| Length bore | 14 mm |
|-------------|-------|

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
|----------------------------|--------|

|                            |       |
|----------------------------|-------|
| Operating temperature max. | 40 °C |
|----------------------------|-------|

|                          |        |
|--------------------------|--------|
| Storage temperature min. | -40 °C |
|--------------------------|--------|

|                          |       |
|--------------------------|-------|
| Storage temperature max. | 80 °C |
|--------------------------|-------|

#### Conformity

|                  |                                               |
|------------------|-----------------------------------------------|
| Product standard | EN 61558-1, EN 61558-2-4, EN 62041 category 0 |
|------------------|-----------------------------------------------|