
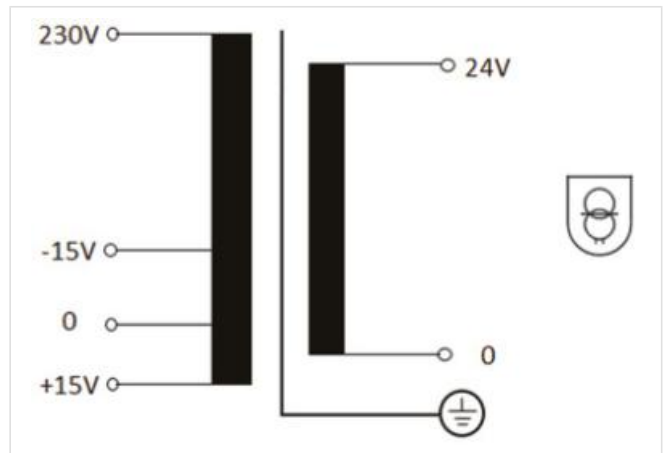
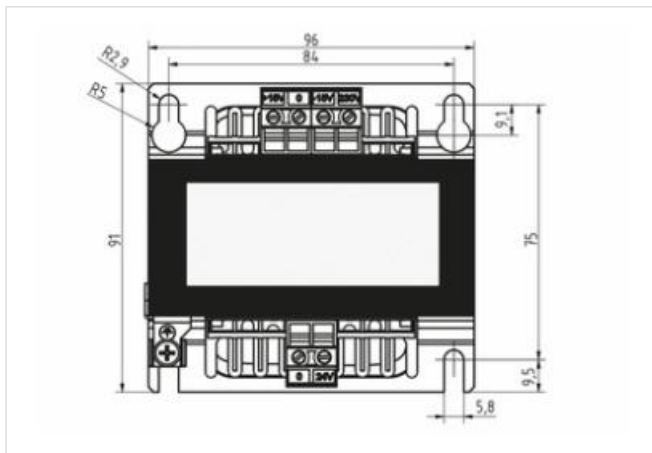


P: 160VA IN: 230VAC +/- 15VAC OUT: 24VAC

Länk till produkt

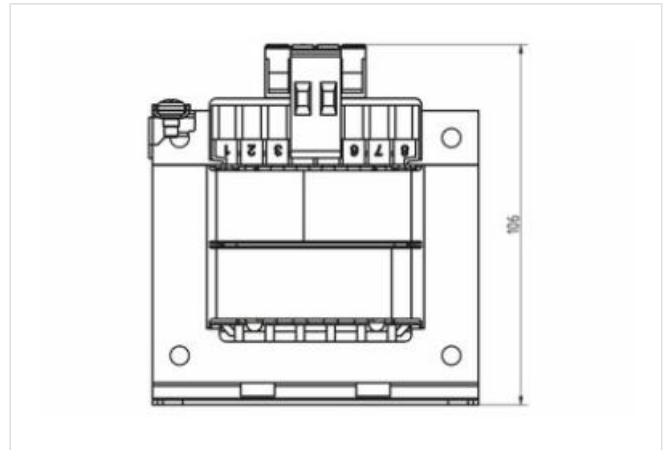

Power frequency	50/60 Hz
-----------------	----------

Input voltage AC	230 V
Current input AC	0,82 A
Max. inrush current	10,8 A
Short-circuit current	10 A

Electrical data | Output

Output voltage AC	24 V
-------------------	------

Mechanical data | Mounting data

Mounting method	screwed
Suitable for mounting type	Schlüssellochabhängung
Mounting dimension a	75 mm
Mounting dimension b	84 mm
Mounting dimension c	2,9 mm
Height	91 mm
Width	96 mm
Depth	106 mm
Diameter bore	2,9 mm
Length bore	9,1 mm

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
Ambient temperature max.	40 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-6, EN 62041
EMC	2014/30/EU

Kommersiella uppgifter

Förpackningsenhet	1
GTIN	4065909078860
Kundens tullnummer	85043180