




MTS 1-Phase safety and isolating transformer

P: 250VA IN: 230VAC +/- 15VAC OUT: 24VAC

The MST series comprises single-phase safety transformers/isolating transformers of the protection class I and protection degree IP00 with double insulation between the primary and secondary windings for general use in industrial applications.

Länk till produkt

Illustration

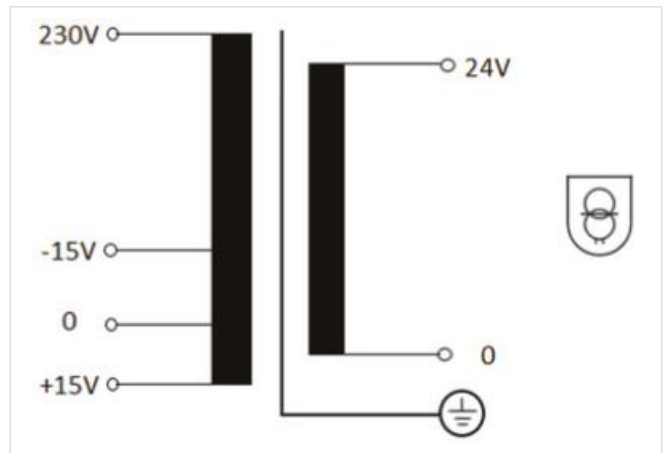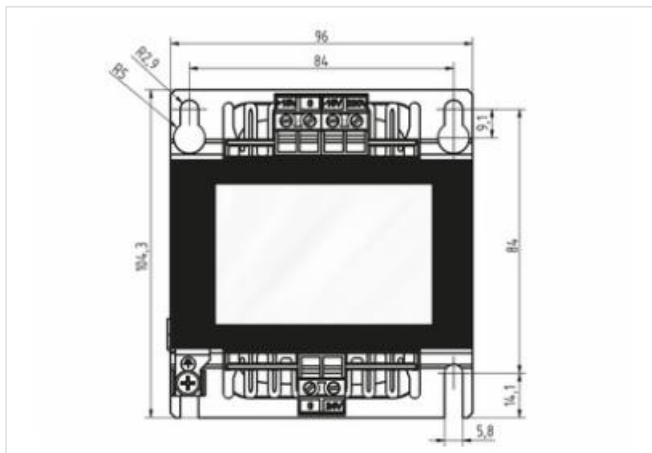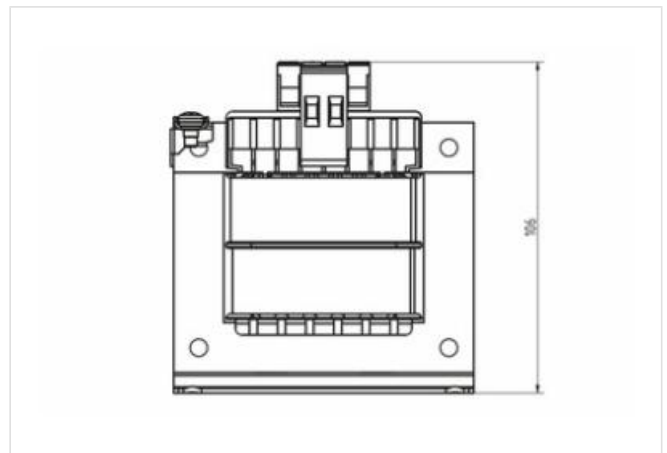

Produkten kan skilja sig från bilden



Electrical data | Supply

Power frequency 50/60 Hz

Electrical data | Input

Input voltage AC	230 V
Current input AC	1,3 A
Max. inrush current	11,8 A
Short-circuit current	13,5 A

Electrical data | Output

Output voltage AC	24 V
-------------------	------

Mechanical data | Mounting data

Mounting method	screwed
Suitable for mounting type	Schlüssellochauhängung
Mounting dimension a	84 mm
Mounting dimension b	84 mm
Mounting dimension c	2,9 mm
Height	104,3 mm
Width	96 mm
Depth	106 mm
Diameter bore	2,9 mm
Length bore	9,1 mm

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
Ambient temperature max.	40 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-6, EN 62041
EMC	2014/30/EU

Kommersiella uppgifter

Förpackningsenhet	1
GTIN	4065909078877
Kundens tullnummer	85043180