




MET 1-Phase safety and isolating transformer

P: 25VA IN: 230-400VAC +/- 15VAC OUT: 230VAC


The MET series comprises single-phase safety transformers/isolating transformers of the protection class I and protection degree IP00 with double insulation between the primary and secondary windings for general use in industrial applications.

Länk till produkt

Illustration

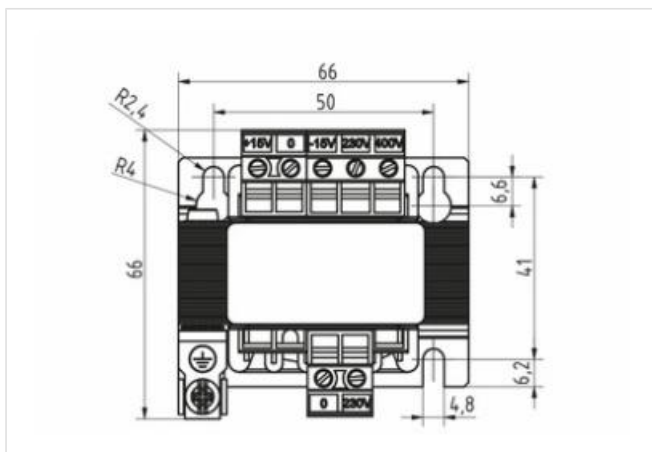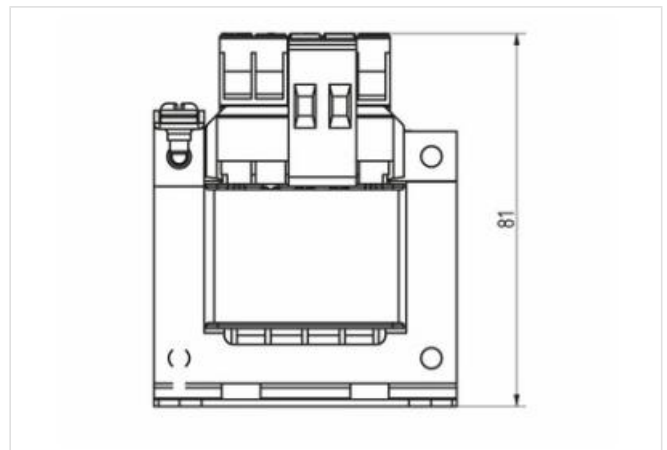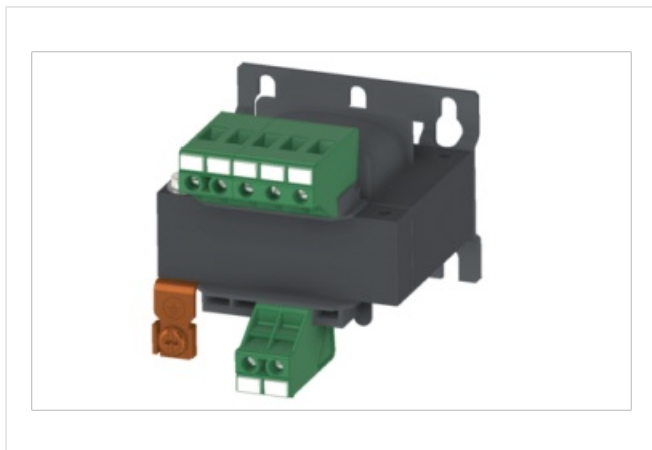

Produkten kan skilja sig från bilden

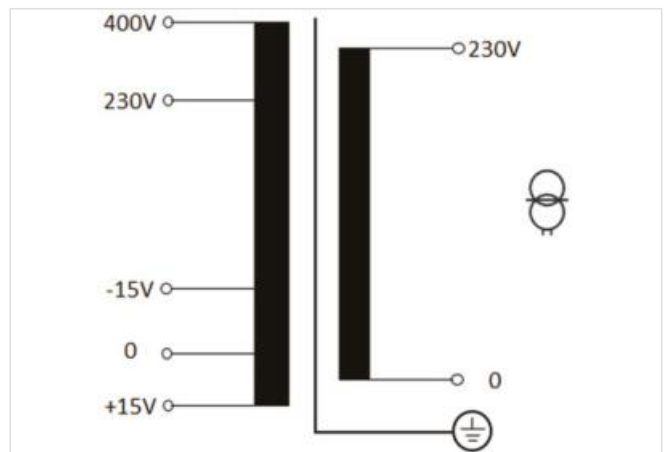

Electrical data | Supply

Power frequency 50/60 Hz

Electrical data | Input

Input voltage 1 AC	230 V
Input voltage 2 AC	400 V
Input current at input voltage 1 AC	0,14 A
Input current at input voltage 2 AC	0,08 A

Inrush current at input voltage 1	2 A
Inrush current at input voltage 2	1,2 A
Short-circuit current at input voltage 1	1,1 A
Short-circuit current at input voltage 2	0,6 A

Electrical data | Output

Output voltage AC	230 V
-------------------	-------

Mechanical data | Mounting data

Mounting method	screwed
Suitable for mounting type	Schlüssellochauhängung
Mounting dimension a	41 mm
Mounting dimension b	50 mm
Mounting dimension c	2,4 mm
Height	66 mm
Width	66 mm
Depth	81 mm
Diameter bore	2,4 mm
Length bore	6,6 mm

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
Ambient temperature max.	50 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-4, EN 62041
EMC	2014/30/EU

Kommersiella uppgifter

Förpackningsenhet	1
GTIN	4065909078938
Kundens tullnummer	85043180