



MET 1-Phase safety and isolating transformer

P: 100VA IN: 230-400VAC +/- 15VAC OUT: 12VAC


The MET series comprises single-phase control transformers/isolating transformers of the protection class I and protection degree IP00 with double insulation between the primary and secondary windings for general use in industrial applications.

Länk till produkt

Illustration

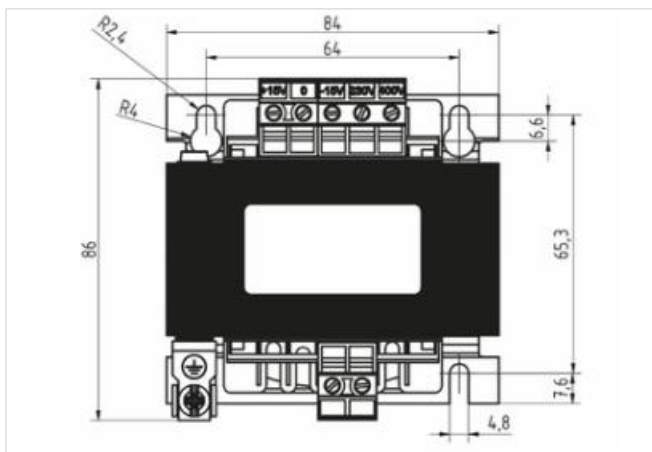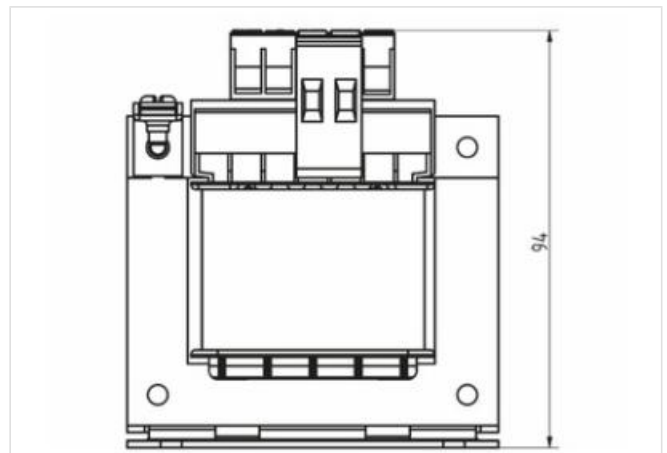

Produkten kan skilja sig från bilden

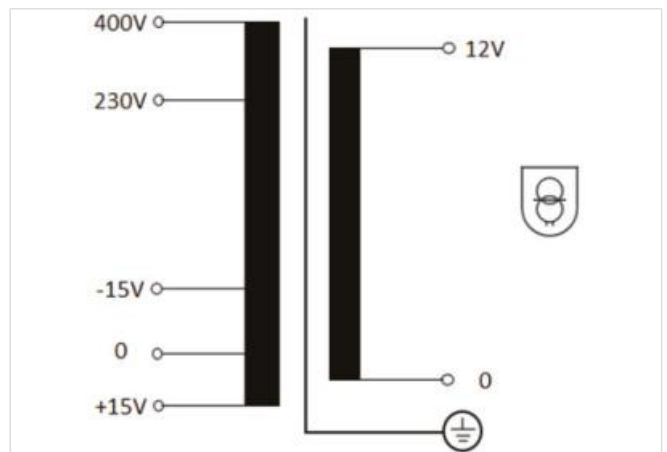

Electrical data | Supply

Power frequency 50/60 Hz

Electrical data | Input

Input voltage 1 AC 230 V

Input voltage 2 AC 400 V

Input current at input voltage 1 AC 0,51 A

Input current at input voltage 2 AC 0,29 A

Inrush current at input voltage 1	9 A
Inrush current at input voltage 2	5,2 A
Short-circuit current at input voltage 1	7,1 A
Short-circuit current at input voltage 2	4,1 A

Electrical data | Output

Output voltage AC	12 V
-------------------	------

Mechanical data | Mounting data

Mounting method	screwed
Suitable for mounting type	Schlüssellochauhängung
Mounting dimension a	65,3 mm
Mounting dimension b	64 mm
Mounting dimension c	2,4 mm
Height	86 mm
Width	84 mm
Depth	94 mm
Diameter bore	2,4 mm
Length bore	6,6 mm

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
Ambient temperature max.	50 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-6, EN 62041
EMC	2014/30/EU

Kommersiella uppgifter

Förpackningsenhet	1
GTIN	4065909079102
Kundens tullnummer	85043180