

MOTOR SUPPRESSION SHIELDING PLUGGABLE

5M PUR 5,5KW-3X575

3× 575 V AC




VDR/star

5.0 m

PUR cable black, 4× 1.5 mm², numbered wires, DESINA conform

[Länk till produkt](#)

Illustration

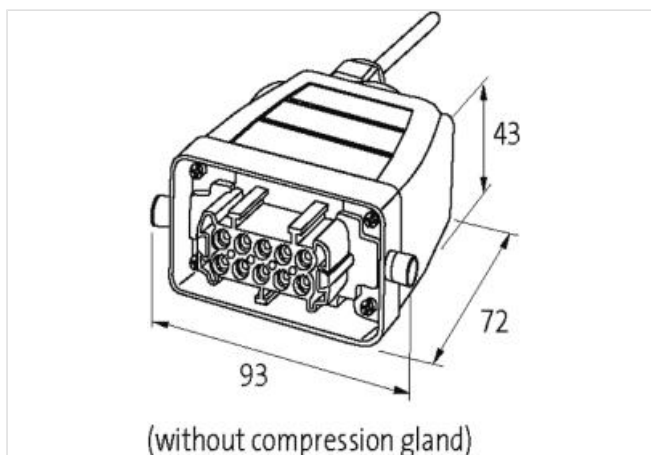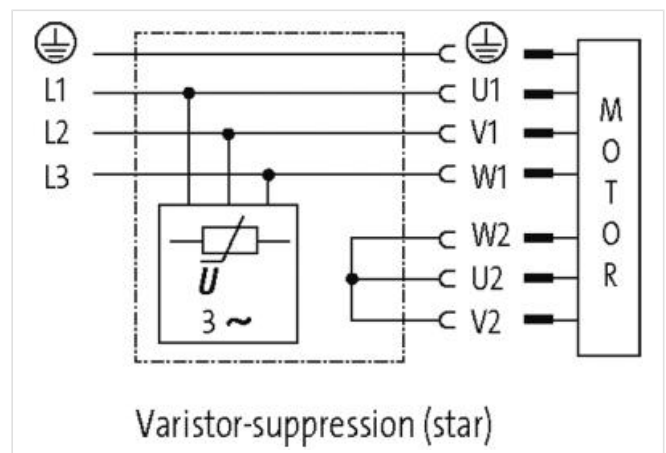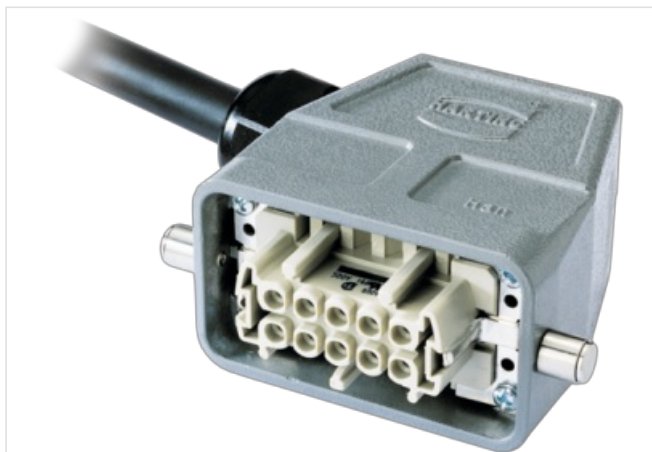

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
-------------	----------

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC000197
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879015134
------	---------------

Kundens tullnummer	85363010
--------------------	----------

Electrical data | Supply

Power frequency	10 ... 400 Hz
-----------------	---------------

Electrical data | Input

Input voltage AC min.	400 V
-----------------------	-------

Input voltage AC max.	575 V
-----------------------	-------

Installation | Connection

Gender	female
--------	--------

Installation | Pin assignment

No. of poles	10 + PE
--------------	---------

Mechanical data | Material data

Coating housing	powder-coated
-----------------	---------------

Material housing	Aluminum die casting
------------------	----------------------

Mechanical data | Mounting data

Height	43 mm
--------	-------

Width	93 mm
-------	-------

Depth	72 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------