

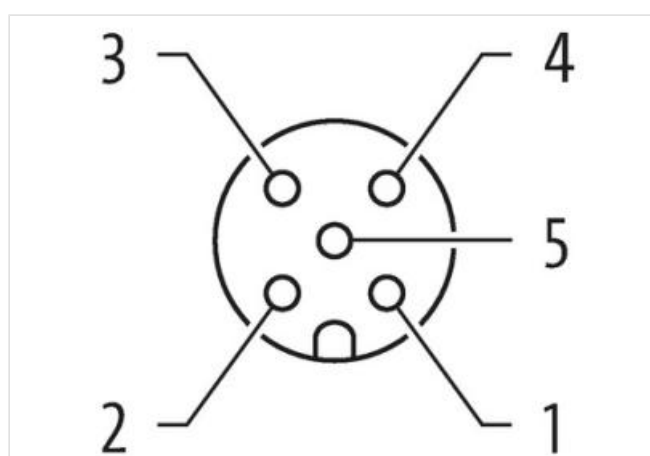
**M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED**

MVC8-UE10.0-XA 10m PVC-CNOMO-cable 16x0,34/3x1

8-way, 5-pole  
 PVC (CNOMO)  
 10.0 m  
 without LED, up to 125 V AC/DC  
 Further cable lengths on request.

**Länk till produkt****Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27279219      |
| ECLASS-7.0         | 27279219      |
| ECLASS-8.0         | 27279219      |
| ECLASS-9.0         | 27440108      |
| ETIM-5.0           | EC002585      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879062299 |
| Kundens tullnummer | 85444290      |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 4 A  |
| Total current max.                 | 10 A |

**Industrial communication**

|                            |   |
|----------------------------|---|
| Number of signals per port | 2 |
|----------------------------|---|

**Installation | Connection**

|              |         |
|--------------|---------|
| Mounting set | M12 x 1 |
|--------------|---------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |

**Mechanical data | Mounting data**

|                 |                |
|-----------------|----------------|
| Mounting method | Schraubgewinde |
| Height          | 127 mm         |

|                                                 |                |
|-------------------------------------------------|----------------|
| Width                                           | 54 mm          |
| Depth                                           | 29 mm          |
| <b>Environmental characteristics   Climatic</b> |                |
| Operating temperature min.                      | -20 °C         |
| Operating temperature max.                      | 80 °C          |
| <b>Connection type 2</b>                        |                |
| Family construction form                        | free cable end |
| No. of poles                                    | 19             |
| Family construction form                        | M12            |
| Gender                                          | female         |
| Color contact carrier                           | black          |
| Coding                                          | A              |
| No. of poles                                    | 5              |
| PIN 1                                           | +              |
| PIN 3                                           | -              |
| PIN 5                                           | PE             |