

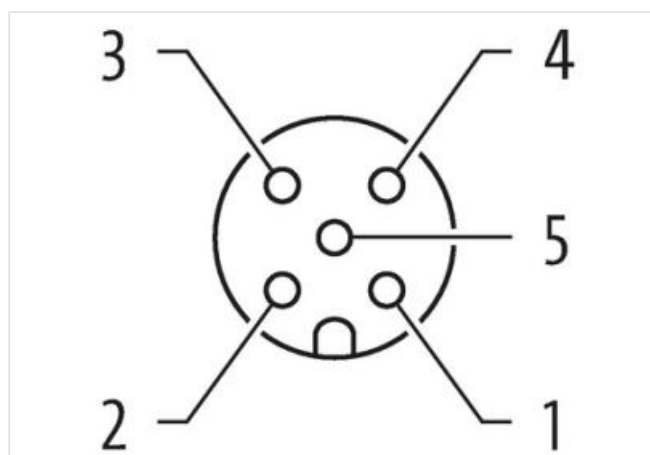
M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED

MVC8-UQQ15.0-XA 15m PUR-CNOMO-cable 16x0,34/3x1

8-way, 5-pole
 PUR/PVC (CNOMO)
 15.0 m
 without LED
 Further cable lengths on request.

Länk till produkt**Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

ECLASS-6.0	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ETIM-5.0	EC002585
Förpackningsenhet	1
GTIN	4048879000222
Kundens tullnummer	85444290

Electrical data | Supply

Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	10 A

Industrial communication

Number of signals per port	2
----------------------------	---

Installation | Connection

Mounting set	M12 x 1
--------------	---------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed

Mechanical data | Mounting data

Mounting method	Schraubgewinde
Height	127 mm

Width	54 mm
-------	-------

Depth	29 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	80 °C
----------------------------	-------

Connection type 3

Family construction form	free cable end
--------------------------	----------------

Color contact carrier	gray
-----------------------	------

No. of poles	13
--------------	----

Family construction form	free cable end
--------------------------	----------------

No. of poles	19
--------------	----

Family construction form	M12
--------------------------	-----

Gender	female
--------	--------

Color contact carrier	black
-----------------------	-------

Coding	A
--------	---

No. of poles	5
--------------	---

PIN 1	+
-------	---

PIN 3	-
-------	---

PIN 5	PE
-------	----