
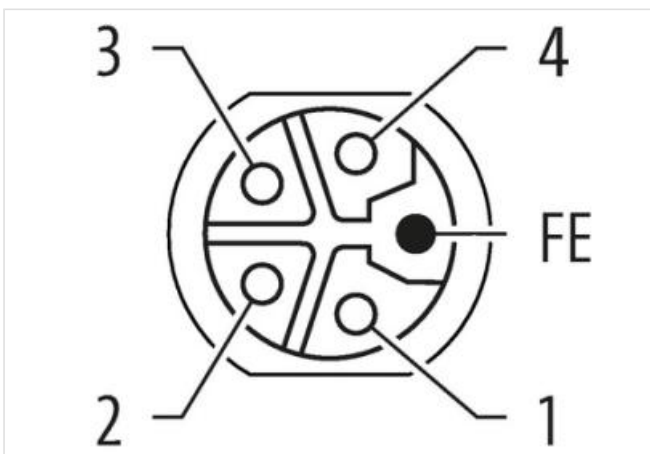


Power Distributor 4x L-cod.

Passive power distributor in zinc die-cast housing
B24 with locking on both sides
Industrial connector 24-pin + PE to 4x M12 L 5P female

Länk till produkt

Illustration

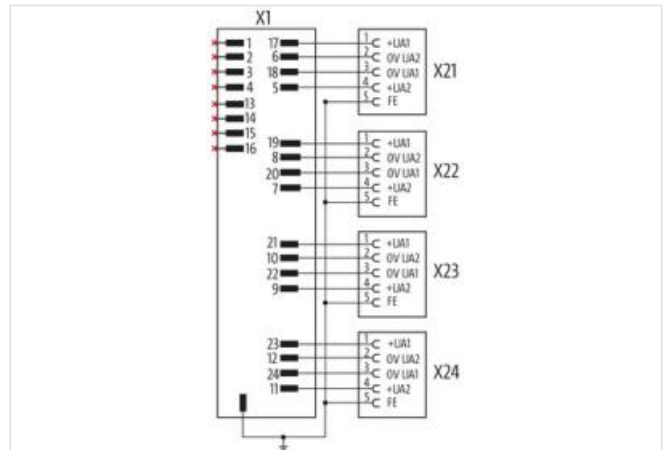

Produkten kan skilja sig från bilden

Electrical data | Supply

Operating voltage AC	48 V
Operating voltage DC	48 V
Current operating per contact max.	16 A

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked

Mechanical data | Material data

Coating housing	powder-coated
Material housing	Aluminum die casting

Mechanical data | Mounting data

Height	94 mm
Width	61 mm

Depth	149 mm
Looking techniques	2-hand fixing (2 clamps)
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	70 °C
Storage temperature min.	-25 °C
Storage temperature max.	85 °C
Kommersiella uppgifter	
Förpackningsenhet	1
GTIN	4048879867504
Kundens tullnummer	85366990