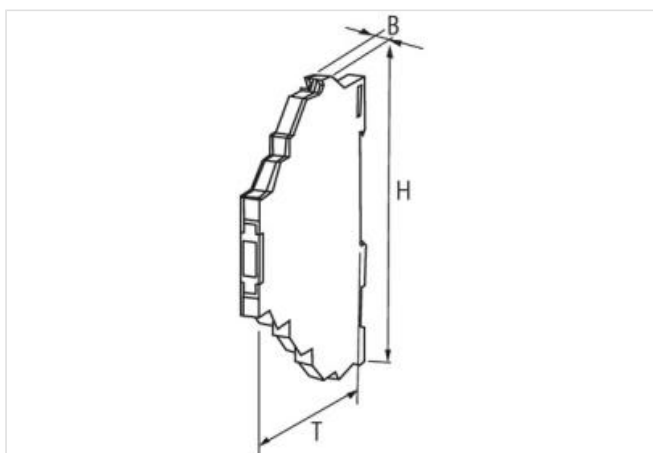
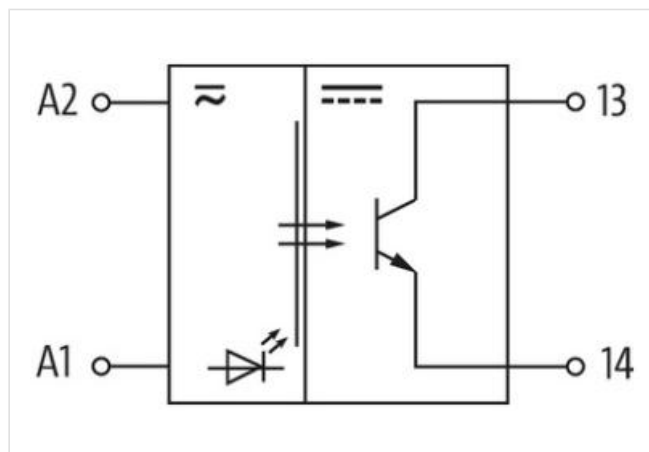


MIRO 6.2 OPTO-COUPLER MODULE

IN: 125 VAC - OUT: 110 VDC / 0.5A

Transistor 0.5 A
 Spring clamp terminals

[Länk till produkt](#)**Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

ECLASS-6.0	27371601
ECLASS-6.1	27371604
ECLASS-7.0	27371604
ECLASS-8.0	27371604
ECLASS-9.0	27371604
ECLASS-10.1	27371604
ECLASS-11.1	27371604
ECLASS-12.0	27371604

ETIM-5.0	EC001504
Förpackningsenhet	1
GTIN	4048879024327
Kundens tullnummer	85414900
Electrical data Input	
Input voltage AC	125 V
Input voltage AC min.	24 V
Input voltage AC max.	156 V
Input voltage OFF AC min.	0 V
Input voltage OFF AC max.	4,5 V
Input voltage OFF DC min.	0 V
Input voltage OFF DC max.	5 V
Input voltage DC	110 V
Input voltage DC min.	24 V
Input voltage DC max.	137 V
Input current min.	1,1 mA
Input current max.	5 mA
Electrical data Output	
Output current min.	0,001 A
Output current max.	0,5 A
Quiescent current OFF max.	0,02 mA
Switching frequency max.	2,5 Hz
Switching voltage DC	110 V
Diagnostics	
Status indication LED	yellow
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP20
Insulation test voltage input - output	4 kV
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Color housing	black
Material housing	Plastic
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	78 mm
Width	6,2 mm
Depth	65 mm
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	70 °C
Derating from	40 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C