



MASI00 55701 WITH CONNECTION CABLE

4 digital inputs , 4 digital output, AB-Slave,

Digital inputs/outputs
DI4/DO4 - 0.2 A (AB)
I/O cable 250 mm
IP00

Länk till produkt

Illustration

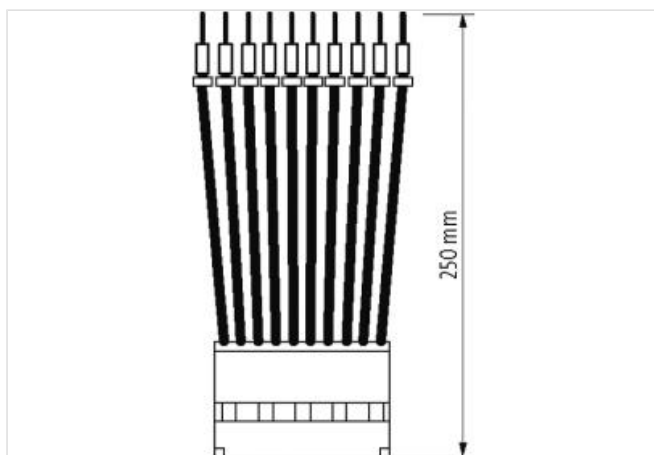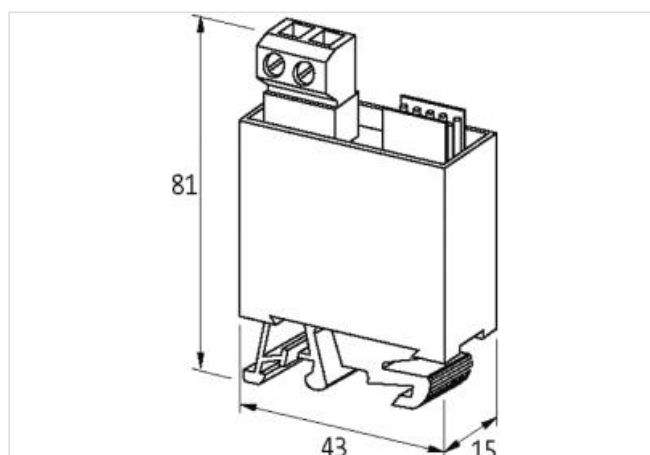

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ETIM-5.0	EC001599
Förpackningsenhet	1

GTIN 4048879450836

Kundens tullnummer 85176200

Electrical data | Supply

Bus voltage AS-Interface DC min. 26,5 V

Bus voltage AS-Interface DC max. 31,6 V

Current consumption AS-i port max. 250 mA

Total current max. 0,12 A

Electrical data | Input

Overload resistant yes

Short-circuit protected yes

Type input for standard switches

Current carrying capacity max. 0,2 A

Electrical data | Output

Switch off time in case of short circuit 50 ms

Overload resistant yes

Short-circuit protected yes

Switching current max. 30 mA

Industrial communication | Bus data

Address setting type Plug-in terminal

Industrial communication | AS-Interface

Profile (IO.ID.ID2) S-7.A.7

Diagnostics

Diagnostic No voltage

Diagnostic via LED per module

LED display Ethernet connection/data traffic

Installation

 Connection cross section min. 0,2 mm²

 Connection cross section max. 2,5 mm²
Installation | Connection

Connection Screw plug-in terminals

Device protection | Electrical

Degree of protection (EN IEC 60529) IP00

Mechanical data | Mounting data

Mounting method geschnappt

Suitable for mounting type mounting rail, (EN 60715)

Height 43 mm

Width 15 mm

Depth 81 mm

Environmental characteristics | Climatic

Operating temperature min. 0 °C

Operating temperature max. 55 °C

Storage temperature min. -20 °C

Storage temperature max. 70 °C

Connection type 2

Connection type 1 Asi Bus

Connection type 2 I / O

Connection Screw terminals SK

Family construction form terminal

Gender male

Color contact carrier	green
No. of poles	2
PIN 1	A +
PIN 2	A -
Connection	Plug-in terminals RK
Family construction form	terminal
Gender	male
Color contact carrier	black
No. of poles	10
PIN 1	0 V
PIN 2	U +
PIN 3	O 0
PIN 4	I 0
PIN 5	O 1
PIN 6	I 1
PIN 7	O 2
PIN 8	I 2
PIN 9	O 3
PIN 10	I 3