
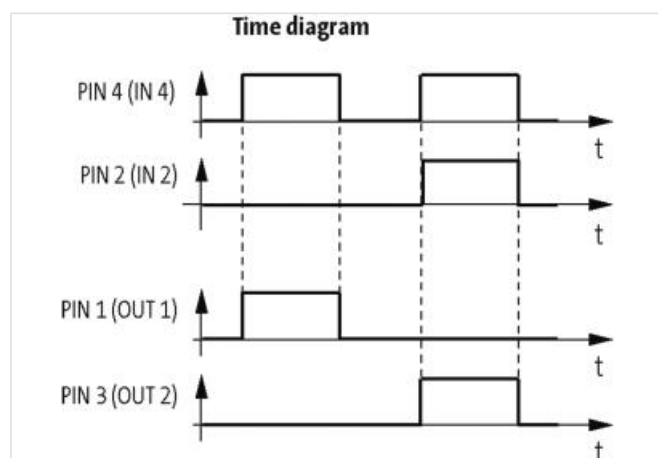


DC MOTOR CONTROL 24V/1A 2X M12

DC Motor control
24 V DC
Current: 1 A

Länk till produkt

Illustration

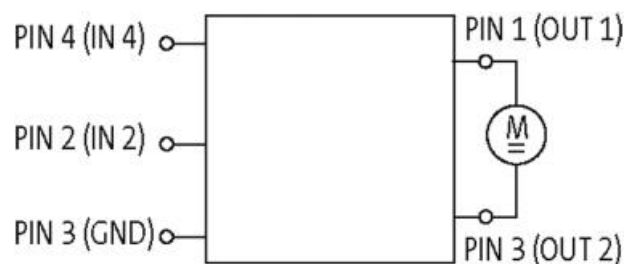

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27242609
ECLASS-6.1	27242609
ECLASS-7.0	27242609
ECLASS-8.0	27242609
ECLASS-9.0	27242609
ECLASS-10.1	27242609
ECLASS-11.1	27242609
ECLASS-12.0	27242609

ETIM-5.0	EC002615
Förpackningsenhet	1
GTIN	4048879315111
Kundens tullnummer	85365080

Electrical data | Input

Input voltage DC	24 V
Input voltage DC min.	5 V
Input voltage DC max.	32 V
Input current	1000 mA

Electrical data | Output

Output voltage adjustable	no
Output current max.	1 A

Installation | Connection

Family construction form	M12
--------------------------	-----

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Protective circuit output	yes, yes, Suppressor diode, 1,5 kW / 36 V
Over voltage protection	yes

Mechanical data | Mounting data

Height	24,5 mm
Width	24,5 mm
Depth	60,5 mm

Environmental characteristics | Climatic

Operating temperature min.	0 °C
Operating temperature max.	60 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C