

MDT three-phase control and isolation transformer

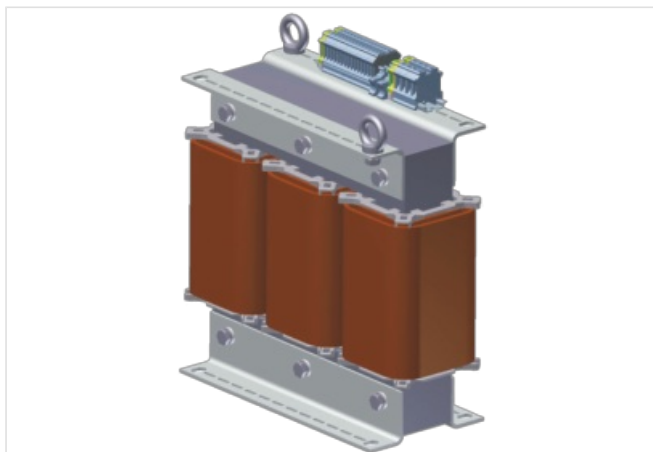
P:21000VA IN:3x400VAC±5% OUT:3x400VAC

3-phase isolation transformer

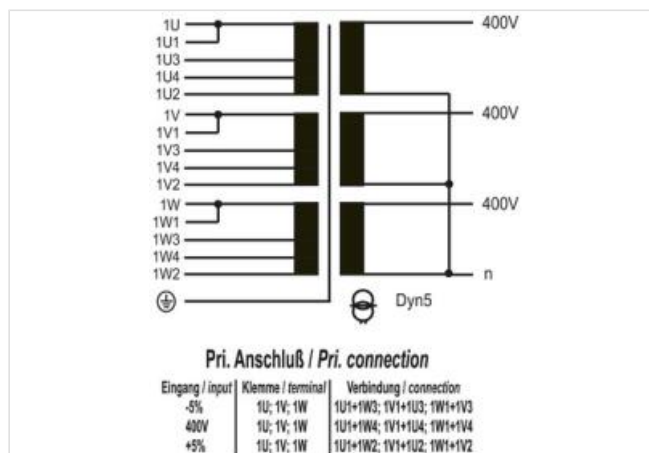
21 000 VA

Isolation class T 40/H

Other voltages on request.

Länk till produkt**Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

ECLASS-6.0	27031301
ECLASS-6.1	27031301
ECLASS-7.0	27031301
ECLASS-8.0	27031301
ECLASS-9.0	27031301
ECLASS-10.1	27031301
ECLASS-11.1	27031301
ECLASS-12.0	27031301
ETIM-5.0	EC002485
Förpackningsenhet	1
GTIN	4048879593366
Kundens tullnummer	85043300

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	400 V
Input voltage AC min.	380 V
Input voltage AC max.	420 V
Input current AC (3-phase)	31,7 A
Max. inrush current	665,7 A

Short-circuit current	749 A
-----------------------	-------

Phase number input	3
--------------------	---

Electrical data | Output

Output voltage	3× 400 V AC
----------------	-------------

Output voltage AC	400 V
-------------------	-------

Output voltage adjustable	no
---------------------------	----

Power rating AC max.	21000 VA
----------------------	----------

Device protection | Electrical

Insulation test voltage input - output	4,5 kV
--	--------

Mechanical data | Mounting data

Mounting method	screwed
-----------------	---------

Mounting dimension a	316 mm
----------------------	--------

Mounting dimension b	173 mm
----------------------	--------

Height	460 mm
--------	--------

Width	420 mm
-------	--------

Depth	260 mm
-------	--------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	40 °C
----------------------------	-------

Storage temperature min.	-40 °C
--------------------------	--------

Storage temperature max.	80 °C
--------------------------	-------