

MST SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:160VA IN:200/208/220/240VAC OUT:2x115VAC

Single-phase - Control and Isolation Transformers



160 VA

Isolation class T 40/B

Other voltages on request.

Länk till produkt

Illustration

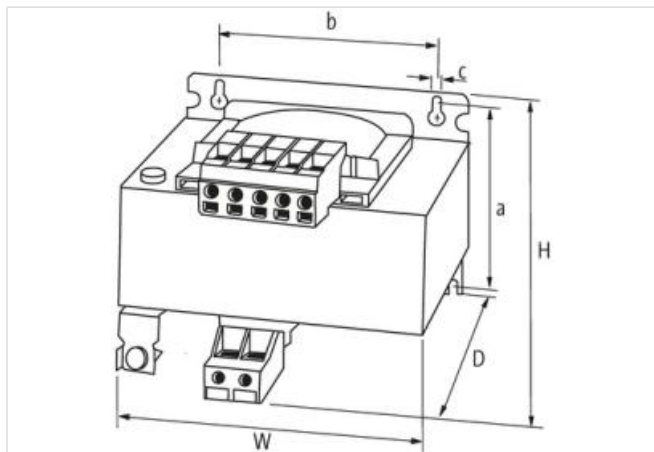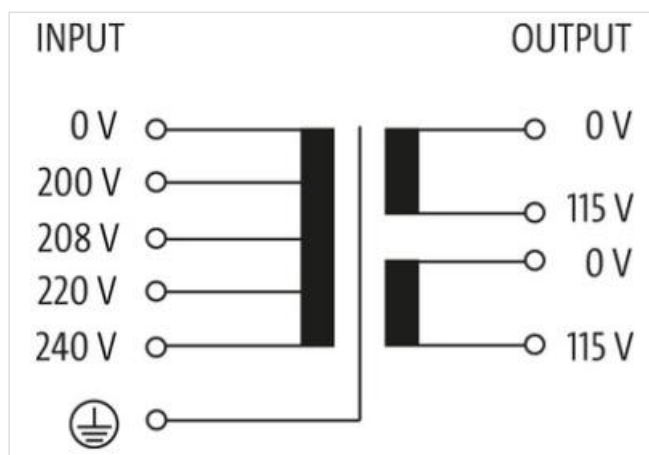

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27031202
ECLASS-6.1	27031302
ECLASS-7.0	27031302
ECLASS-8.0	27031302
ECLASS-9.0	27031302
ECLASS-10.1	27031302

ECLASS-11.1	27031302
ECLASS-12.0	27031302
ETIM-5.0	EC002486
Förpackningsenhet	1
GTIN	4048879311632
Kundens tullnummer	85043180

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	200, 208, 220, 240
Input voltage AC	200 V
Current input AC	0,92 A
Max. inrush current	9 A
Short-circuit current	14,4 A

Electrical data | Output

Output voltage	2 × 115 V AC
Output voltage AC	115 V
Output voltage adjustable	no
Power rating AC max.	160 VA

Device protection | Electrical

Insulation test voltage input - output	3,9 kV
--	--------

Mechanical data | Mounting data

Suitable for mounting type	Schlüssellochauhängung
Mounting dimension a	75,3 mm
Mounting dimension b	84 mm
Mounting dimension c	5,8 mm
Height	91 mm
Width	97 mm
Depth	105 mm
Diameter bore	5,8 mm
Length bore	12 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	40 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-4, EN 62041 category 0
------------------	---

Connection type 3

Connection type 1	Input
Connection type 2	Output
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	5
PIN 2	200 V
PIN 3	208 V
PIN 4	220 V
PIN 5	240 V
Connection	Screw terminals SK
Family construction form	terminal

Gender	female
No. of poles	4
PIN 3	115 V
PIN 4	115 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	metallic
No. of poles	1
PIN 1	PE