



MET SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:1000VA IN:440VAC±5% OUT:127VAC

Single-phase - Control and Isolation Transformers
1000 VA
Isolation class T 60/B

[Länk till produkt](#)

Illustration

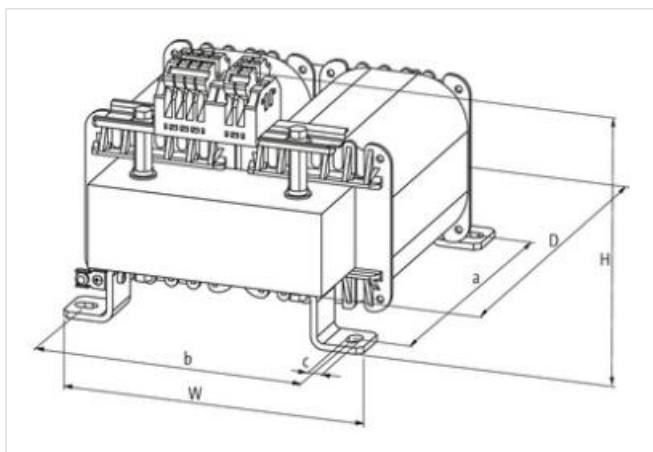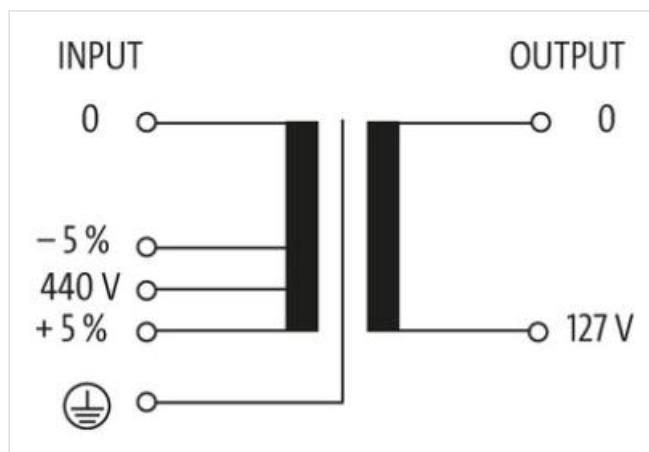

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27031202
ECLASS-6.1	27031302
ECLASS-7.0	27031302
ECLASS-8.0	27031302
ECLASS-9.0	27031302
ECLASS-10.1	27031302
ECLASS-11.1	27031302

ECLASS-12.0	27031302
-------------	----------

ETIM-5.0	EC002485
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879335096
------	---------------

Kundens tullnummer	85043180
--------------------	----------

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	440 V
------------------	-------

Input voltage AC min.	418 V
-----------------------	-------

Input voltage AC max.	462 V
-----------------------	-------

Current input AC	2,43 A
------------------	--------

Max. inrush current	45 A
---------------------	------

Short-circuit current	100 A
-----------------------	-------

Electrical data | Output

Output voltage AC	127 V
-------------------	-------

Output voltage adjustable	no
---------------------------	----

Power rating AC max.	1000 VA
----------------------	---------

Device protection | Electrical

Insulation test voltage input - output	5,9 kV
--	--------

Mechanical data | Mounting data

Suitable for mounting type	Long-hole mounting
----------------------------	--------------------

Mounting dimension a	111,5 mm
----------------------	----------

Mounting dimension b	135 mm
----------------------	--------

Mounting dimension c	7 mm
----------------------	------

Height	137 mm
--------	--------

Width	174 mm
-------	--------

Depth	165 mm
-------	--------

Diameter bore	7 mm
---------------	------

Length bore	16 mm
-------------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------

Storage temperature min.	-40 °C
--------------------------	--------

Storage temperature max.	80 °C
--------------------------	-------

Conformity

Product standard	EN 61558-2-6, EN 62041 category 0
------------------	-----------------------------------