



MVP12, 6XM12, MOSA, CON. CAP

With potent. sep.

pluggable connection cap
Potential separation as option
with LED for digital PNP-signals 24 V DC
quick connection elements included
Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.

Länk till produkt

Illustration

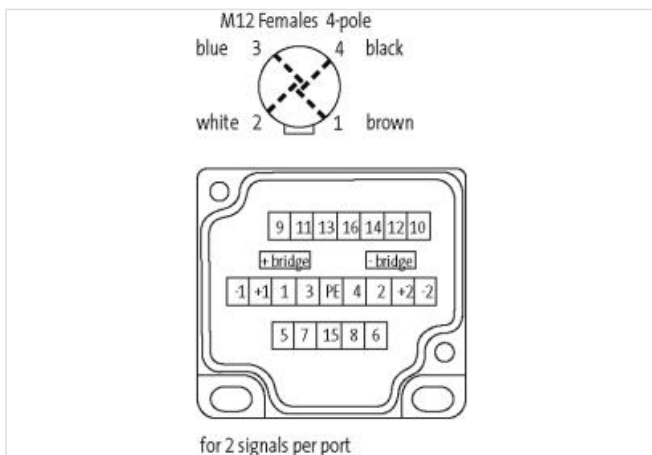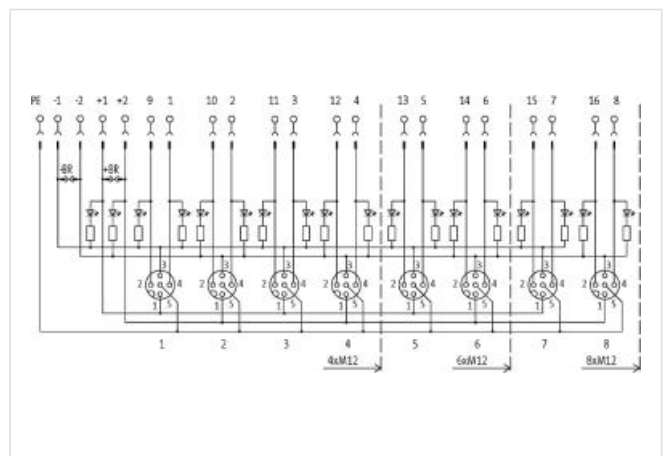

Produkten kan skilja sig från bilden

Kommersiella uppgifter

ECLASS-6.0	27279219
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ECLASS-10.1	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111

ETIM-5.0 EC002585

Förpackningsenhet	1
GTIN	4048879057493
Kundens tullnummer	85369010

Electrical data | Supply

Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current at 1 time current feed-in max.	8 A
Total current at 2 times current feed-in max.	16 A

Industrial communication

Number of signals per port	2
----------------------------	---

Installation

Connection cross section min.	0,25 mm ²
Connection cross section max.	0,5 mm ²

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	screwed, mounted

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Mounting method	Cap nut
Height	43 mm
Width	50,2 mm
Depth	145 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	80 °C

Connection type 2

Family construction form	Cap
No. of poles	16
Family construction form	M12
Gender	male
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	+
PIN 2	NC S 2
PIN 3	-
PIN 4	NO S 1
PIN 5	PE