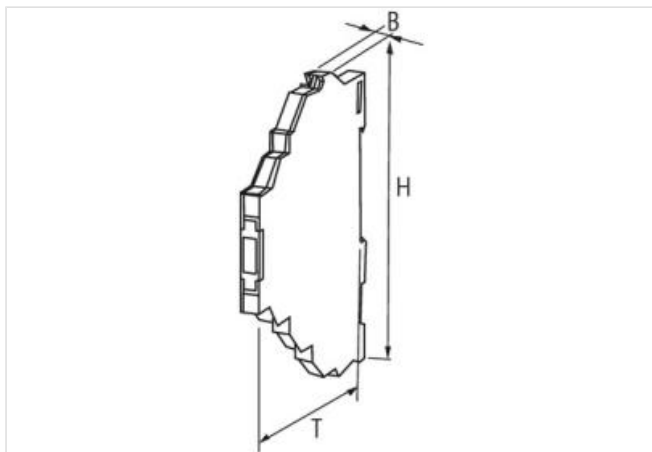
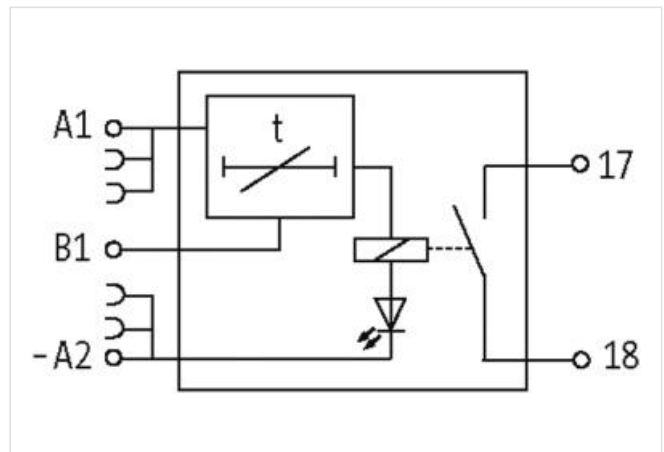


**MIRO OFF-DELAY ZEITRELAY 24VDC-1S****MIRO 6.2 TIMER OFF-DELAY**

Relay output  
 Switch-off delay: 3...300 s  
 Spring clamp terminals  
 safe separation (EN 60947-1)

[Länk till produkt](#)**Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27371790 |
| ECLASS-6.1  | 27371790 |
| ECLASS-7.0  | 27371790 |
| ECLASS-8.0  | 27371605 |
| ECLASS-9.0  | 27371605 |
| ECLASS-10.1 | 27371605 |

ECLASS-11.1 27371605

ECLASS-12.0 27371605

ETIM-5.0 EC001439

Förpackningsenhet 1

GTIN 4048879021920

Kundens tullnummer 85364900

**Electrical data | Input**

Input voltage DC 24 V

Input voltage DC min. 20,4 V

Input voltage DC max. 26,4 V

Input current 20 mA

Input current DC max. 10 mA

Control voltage DC 24 V

Control voltage DC min. 20,4 V

Control voltage DC max. 26,4 V

Control current 5 mA

**Electrical data | Output**

Output voltage adjustable no

Output current max. 6 A

Utilization category AC-12 (EN IEC 60947-5-1) 6 A @ 24, 6 A @ 110 V, 6 A @ 230 V

Utilization category AC-15 (EN IEC 60947-5-1) 3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V

Utilization category DC-13 (EN IEC 60947-5-1) 1 A @ 24 V, 0,2 A @ 110 V, 0,1 A @ 230 V

Switching frequency max. 10 Hz

Power rating AC max. 1500 VA

Power rating DC max. 120 W

Switching voltage AC max. 250 V

Switching voltage DC max. 250 V

Switching current DC 100 mA

**Device protection**

Condition lifetime load-dependent

**Device protection | Electrical**

Rated surge voltage 4 kV

Electrical lifetime 20000000 Cycles

**Device protection | Mechanical**

Mechanical endurance 20000000 Cycles

**Mechanical data**

Drop-out time max. 15 ms

Response time max. 10 ms

Bounce time max. 1,5 ms

**Mechanical data | Material data**

Material contact Ag Sn O2

**Mechanical data | Mounting data**

Mounting method geschnappt

Suitable for mounting type mounting rail, (EN 60715)

Height 91 mm

Width 6,2 mm

Depth 70 mm

**Environmental characteristics | Climatic**

Operating temperature min. 0 °C

Operating temperature max. 55 °C

**Connection type 5**

|                          |                           |
|--------------------------|---------------------------|
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | + A 1                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | 18                        |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | 17                        |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | + B 1                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | - A 2                     |