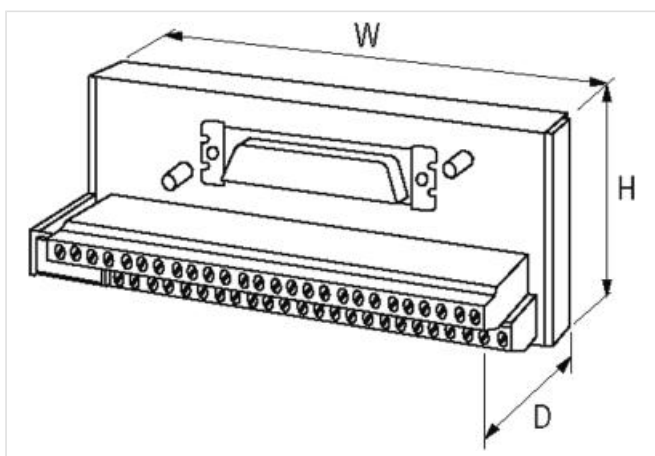
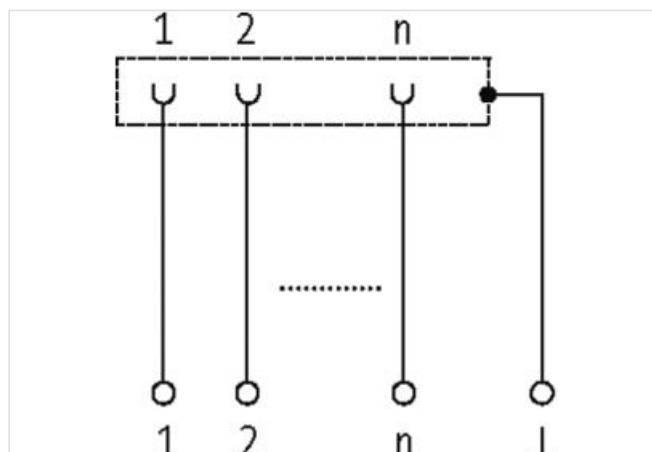


**SV-SUB D 15BU.-KL FK**

Female connector  
 15-pole  
 Spring clamp terminals

**Länk till produkt****Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27379201 |
| ECLASS-6.1  | 27260708 |
| ECLASS-7.0  | 27141152 |
| ECLASS-8.0  | 27141152 |
| ECLASS-9.0  | 27141152 |
| ECLASS-10.1 | 27141152 |
| ECLASS-11.1 | 27141152 |
| ECLASS-12.0 | 27141152 |

|                    |               |
|--------------------|---------------|
| ETIM-5.0           | EC001283      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879021579 |
| Kundens tullnummer | 85366990      |

**Electrical data | Supply**

|                        |       |
|------------------------|-------|
| Operating voltage AC   | 125 V |
| Operating voltage DC   | 150 V |
| Operating current max. | 2 A   |

**Device protection | Electrical**

|                                   |    |
|-----------------------------------|----|
| Overvoltage category (EN 60664-1) | II |
|-----------------------------------|----|

**Mechanical data | Mounting data**

|                            |                                                |
|----------------------------|------------------------------------------------|
| Mounting method            | geschnappt                                     |
| Suitable for mounting type | mounting rail, (EN 60715)                      |
| Height                     | 63 mm                                          |
| Width                      | 75 mm                                          |
| Depth                      | 48 mm                                          |
| Looking techniques         | Standard UNC 4-40 screw thread bolt (EN 60807) |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |