

## MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 630VA IN: 230VAC+/- 5% OUT: 230VAC

Single-phase - Control and Isolation Transformers



630 VA

Spring clamp terminals

Isolation class T 60/B

### Länk till produkt

#### Illustration

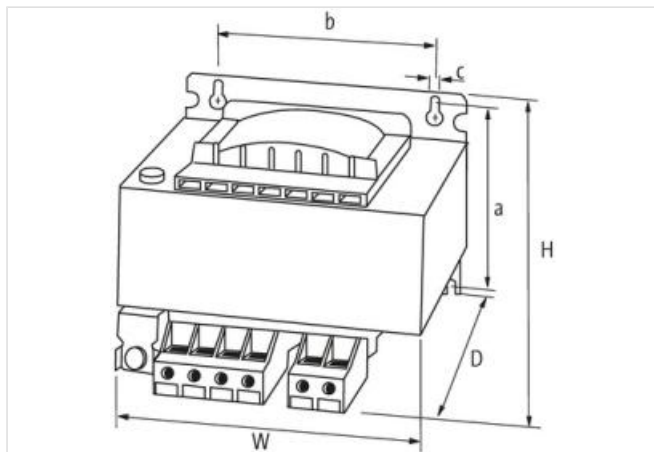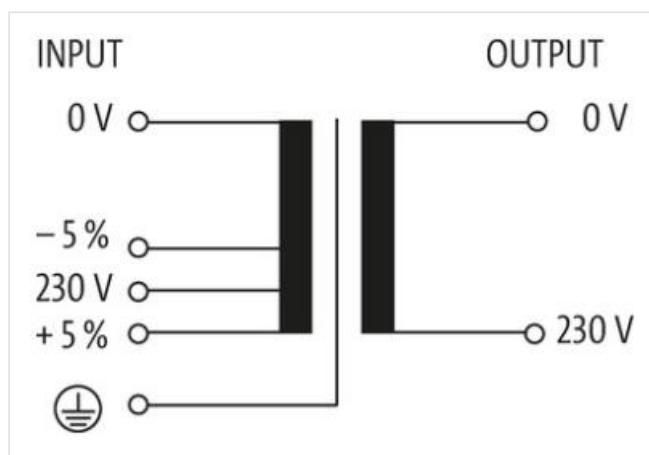

Produkten kan skilja sig från bilden



#### Kommersiella uppgifter

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27031302 |
| ECLASS-6.1  | 27031302 |
| ECLASS-7.0  | 27031302 |
| ECLASS-8.0  | 27031302 |
| ECLASS-9.0  | 27031302 |
| ECLASS-10.1 | 27031302 |

|                    |               |
|--------------------|---------------|
| ECLASS-11.1        | 27031302      |
| ECLASS-12.0        | 27031302      |
| ETIM-5.0           | EC002486      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879066495 |
| Kundens tullnummer | 85043180      |

**Electrical data | Supply**

|                 |              |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

**Electrical data | Input**

|                       |         |
|-----------------------|---------|
| Input voltage AC      | 230 V   |
| Input voltage AC min. | 218,5 V |
| Input voltage AC max. | 241,5 V |
| Current input AC      | 2,98 A  |
| Max. inrush current   | 75,6 A  |
| Short-circuit current | 82,3 A  |

**Electrical data | Output**

|                           |        |
|---------------------------|--------|
| Output voltage AC         | 230 V  |
| Output voltage adjustable | no     |
| Power rating AC max.      | 630 VA |

**Device protection | Electrical**

|                                        |      |
|----------------------------------------|------|
| Insulation test voltage input - output | 4 kV |
|----------------------------------------|------|

**Mechanical data | Mounting data**

|                            |                        |
|----------------------------|------------------------|
| Suitable for mounting type | Schlüssellochauhängung |
| Mounting dimension a       | 107,5 mm               |
| Mounting dimension b       | 122 mm                 |
| Mounting dimension c       | 7 mm                   |
| Height                     | 129 mm                 |
| Width                      | 150 mm                 |
| Depth                      | 148 mm                 |
| Diameter bore              | 7 mm                   |
| Length bore                | 11 mm                  |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |
| Storage temperature min.   | -40 °C |
| Storage temperature max.   | 80 °C  |

**Conformity**

|                  |                                               |
|------------------|-----------------------------------------------|
| Product standard | EN 61558-1, EN 61558-2-4, EN 62041 category 0 |
|------------------|-----------------------------------------------|