

Set T-Coupler M12 male/2xM12 female+T-Coupler Holder

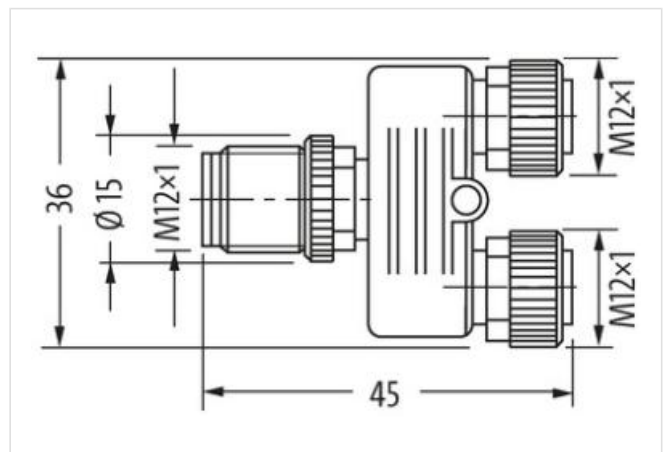
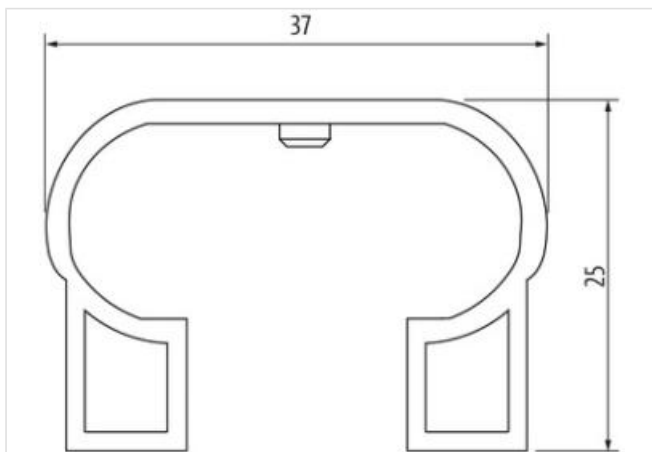
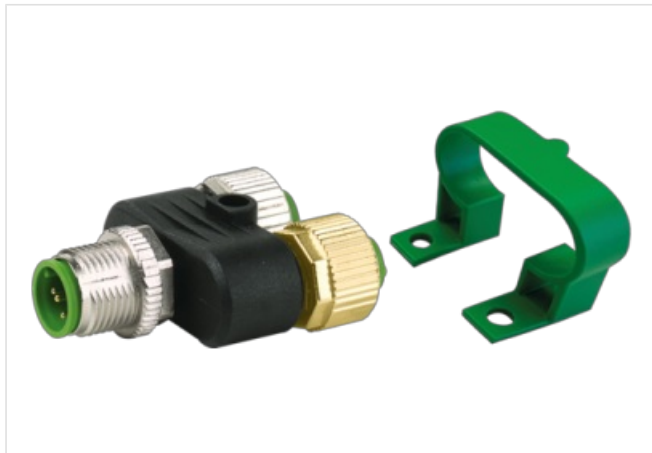
7000-41121-0000000 + 7000-99831-0000000

Set consists of:

1 × 7000-99831-0000000

good resistance to oil and chemicals

The resistance to aggressive media should be individually tested for your application. Further details on request.

Länk till produkt**Illustration**

Produkten kan skilja sig från bilden

Kommersiella uppgifter

ECLASS-6.0	27279218
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440106
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC001855
Förpackningsenhet	1

GTIN 4048879857222

Kundens tullnummer 85366990

Electrical data | Supply

Operating voltage AC max. 60 V

Operating voltage DC max. 60 V

Operating voltage AC (UL-listed) 30 V

Operating voltage DC (UL-listed) 30 V

Current operating per contact max. 4 A

Installation | Connection

Tightening torque 0,6 Nm

Mounting set M12 x 1

Device protection | Electrical

Degree of protection (EN IEC 60529) IP67

Additional condition protection degree inserted, screwed

Pollution Degree 3

Rated surge voltage 1,5 kV

Material group (IEC 60664-1) I

Mechanical data | Material data

Coating locking Nickeled

Locking material Zinc die-casting

Mechanical data | Mounting data

Mounting method inserted, screwed, Shaking protection

Environmental characteristics | Climatic

Operating temperature min. -25 °C

Operating temperature max. 85 °C