

SUPPRESSOR FOR SIEMENS CONTACTOR S00 MOTOR

RC, star, 3x575 VAC, 7.5 kV



3 × 575 V AC

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

[Länk till produkt](#)

Illustration

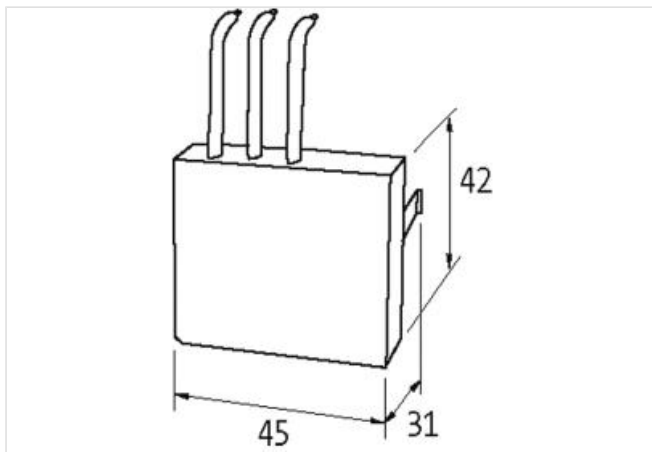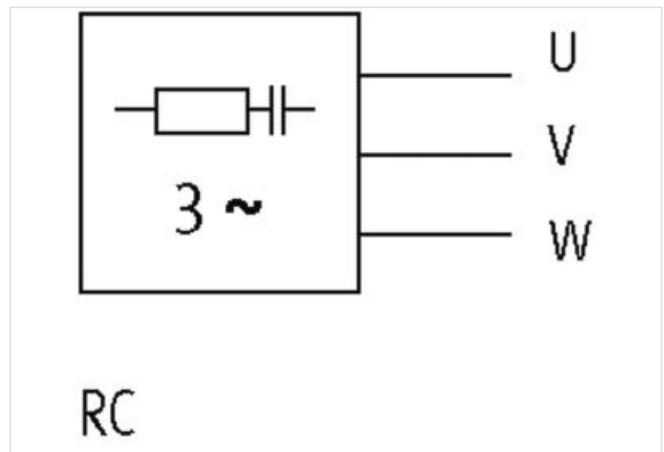

Produkten kan skilja sig från bilden

Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013
ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC002498
Förpackningsenhet	10
GTIN	4048879413176

Kundens tullnummer 85363010

Electrical data | Supply

Power frequency 50 ... 60 Hz

Electrical data | Input

Input voltage AC 575 V

Installation | Connection

Connection information Connection wires

Device protection | Media

Flame resistance flame retardant

Mechanical data | Material data

Combustibility class housing (UL94) V-0

Material housing Plastic

Material potting compound 2-component epoxy

Mechanical data | Mounting data

Mounting method geschnappt

Suitable for mounting type Siemens Schütz Sirius 3 RT 201 mit Federzuganschluss

Height 42 mm

Width 45 mm

Depth 31 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C