

SIEMENS CONTACTOR SUPPRESSOR

Varistor and LED, 24VAC/DC

24 V AC/DC



48 V AC/DC

VDR + LED

For other configurations and voltages, please inquire.

Länk till produkt

Illustration

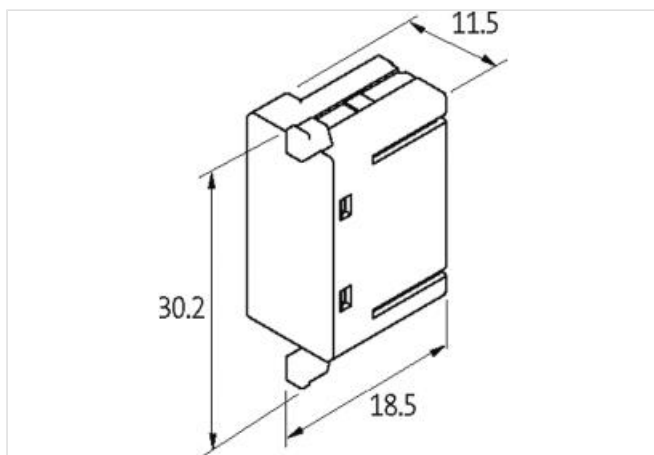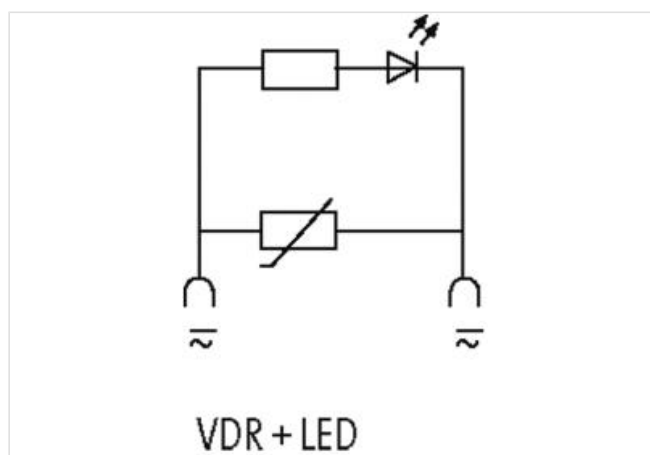

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
-------------	----------

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC002498
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879010825
------	---------------

Kundens tullnummer	85363010
--------------------	----------

Compatibility | Compatible with

Appropriate contactors	3 RT 20.25/26/27/28
------------------------	---------------------

Electrical data

Damping factor	1.5× UN
----------------	---------

Electrical data | Input

Input voltage AC min.	12 V
-----------------------	------

Input voltage AC max.	48 V
-----------------------	------

Input voltage DC min.	12 V
-----------------------	------

Input voltage DC max.	48 V
-----------------------	------

Installation | Connection

Connection information	Plug contact
------------------------	--------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Height	18,5 mm
--------	---------

Width	30,2 mm
-------	---------

Depth	11,5 mm
-------	---------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	70 °C
----------------------------	-------