

TELEMECANIQUE CONTACTOR SUPPRESSOR

Varistor, 230VAC/DC



230 V AC/DC

VDR

For other configurations and voltages, please inquire.

[Länk till produkt](#)

Illustration

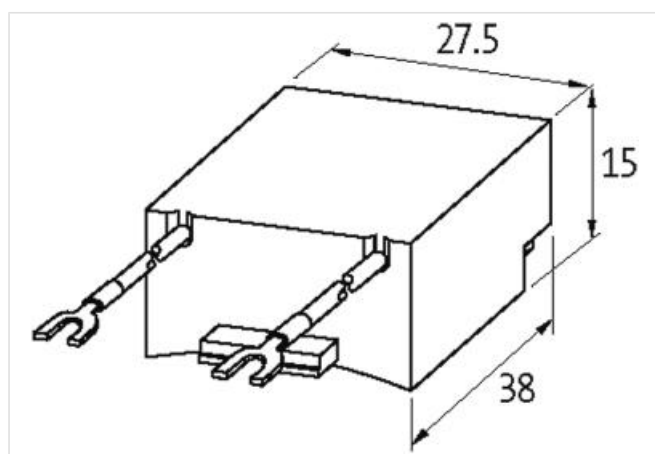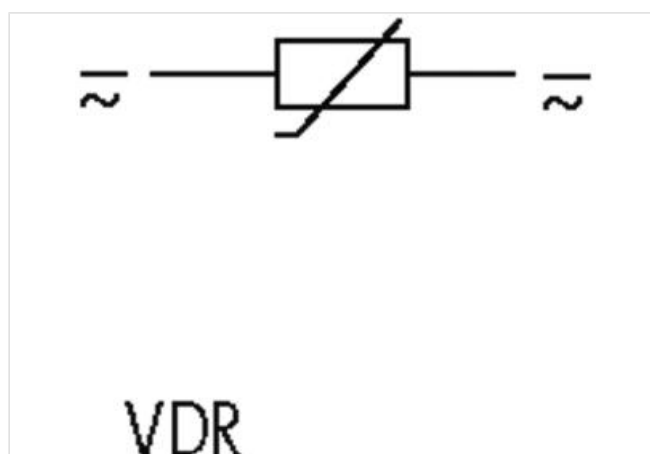

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013
ECLASS-11.1	27371013

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC002498
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879010238
------	---------------

Kundens tullnummer	85363010
--------------------	----------

Compatibility | Compatible with

Appropriate contactors	DT40, LC 1 D09...D38, LC 1 DT20, LC 2 D09...D38
------------------------	---

Electrical data

Damping factor	1.5× UN
----------------	---------

Electrical data | Input

Input voltage AC min.	127 V
-----------------------	-------

Input voltage AC max.	253 V
-----------------------	-------

Input voltage DC min.	127 V
-----------------------	-------

Input voltage DC max.	253 V
-----------------------	-------

Installation | Connection

Connection information	self-securing cable forks
------------------------	---------------------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Height	15 mm
--------	-------

Width	27,5 mm
-------	---------

Depth	38 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	70 °C
----------------------------	-------