

TELEMECANIQUE CONTACTOR SUPPRESSOR

RC, 24-48VAC/DC

24 V AC/DC



48 V AC/DC

RC

For other configurations and voltages, please inquire.

[Länk till produkt](#)

Illustration

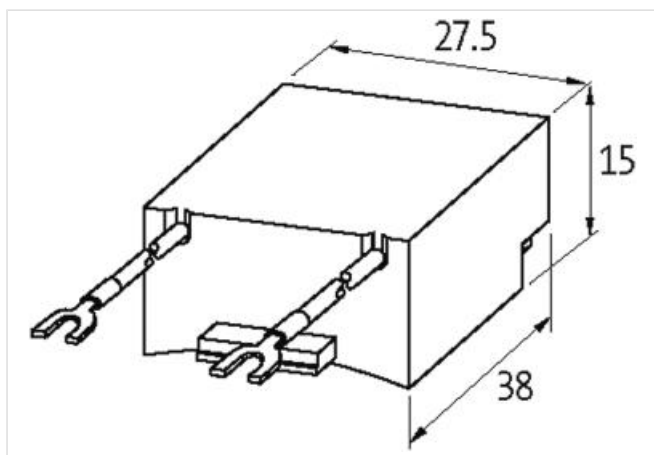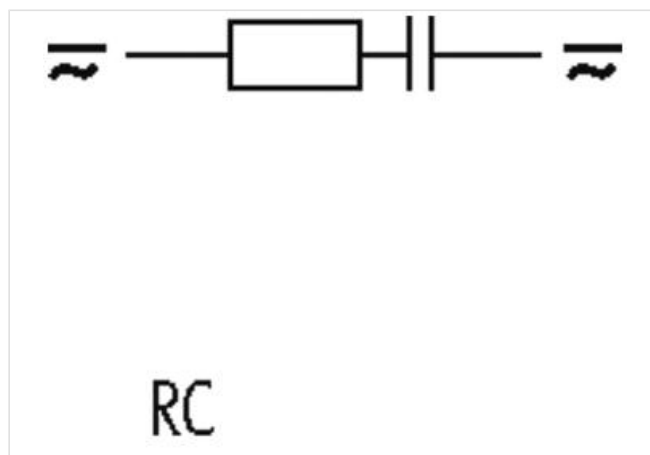

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
-------------	----------

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC002498
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879010214
------	---------------

Kundens tullnummer	85363010
--------------------	----------

Compatibility | Compatible with

Appropriate contactors	DT40, LC 1 D09...D38, LC 1 DT20, LC 2 D09...D38
------------------------	---

Electrical data

Damping factor	1.5× UN
----------------	---------

Electrical data | Input

Input voltage AC min.	12 V
-----------------------	------

Input voltage AC max.	70 V
-----------------------	------

Input voltage DC min.	12 V
-----------------------	------

Input voltage DC max.	70 V
-----------------------	------

Installation | Connection

Connection information	self-securing cable forks
------------------------	---------------------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Height	15 mm
--------	-------

Width	27,5 mm
-------	---------

Depth	38 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	70 °C
----------------------------	-------