



## MIRO 6.2 PLUGGABLE COMPL.MODULE OUTPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/30VDC / 6 A

1 NO/NC contact  
6 A  
24 V AC/DC  
Spring clamp terminals

### Länk till produkt

#### Illustration

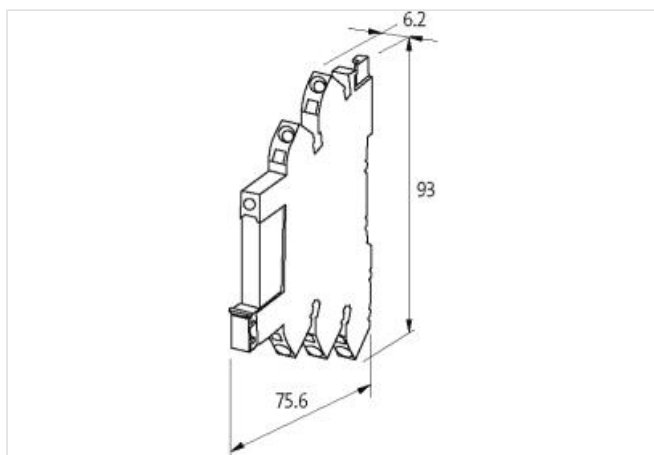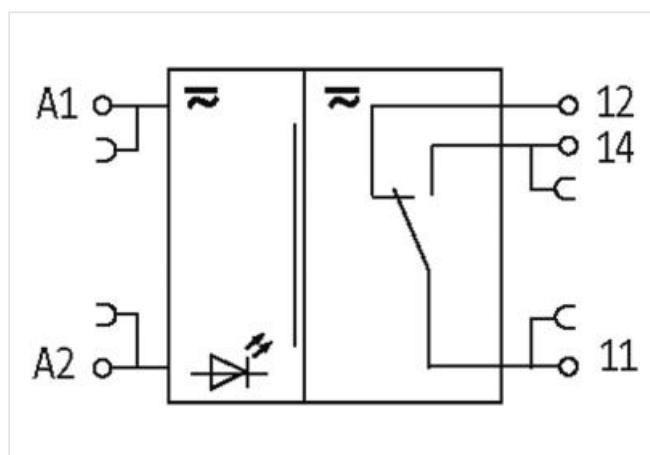

Produkten kan skilja sig från bilden



#### Kommersiella uppgifter

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27371601 |
| ECLASS-6.1  | 27371601 |
| ECLASS-7.0  | 27371601 |
| ECLASS-8.0  | 27371601 |
| ECLASS-9.0  | 27371601 |
| ECLASS-10.1 | 27371601 |

|                                                 |                                          |
|-------------------------------------------------|------------------------------------------|
| ECLASS-11.1                                     | 27371601                                 |
| ECLASS-12.0                                     | 27371601                                 |
| ETIM-5.0                                        | EC001437                                 |
| Förpackningsenhet                               | 1                                        |
| GTIN                                            | 4048879021432                            |
| Kundens tullnummer                              | 85364900                                 |
| <b>Electrical data   Input</b>                  |                                          |
| Input voltage AC                                | 24 V                                     |
| Input voltage AC min.                           | 19,2 V                                   |
| Input voltage AC max.                           | 28,8 V                                   |
| Input voltage DC                                | 24 V                                     |
| Input voltage DC min.                           | 19,2 V                                   |
| Input voltage DC max.                           | 28,8 V                                   |
| Input current                                   | 12 mA                                    |
| <b>Electrical data   Output</b>                 |                                          |
| Utilization category AC-12 (EN IEC 60947-5-1)   | 6 A @ 24, 6 A @ 110 V, 6 A @ 230 V       |
| Utilization category AC-15 (EN IEC 60947-5-1)   | 3 A @ 24 V, 3 A @ 110 V, 1,5 A @ 230 V   |
| Utilization category DC-13 (EN IEC 60947-5-1)   | 1 A @ 24 V, 0,2 A @ 110 V, 0,1 A @ 230 V |
| Switching frequency max.                        | 10 Hz                                    |
| Power rating AC max.                            | 1500 VA                                  |
| Power rating DC max.                            | 180 W                                    |
| Switching voltage AC max.                       | 250 V                                    |
| Switching voltage DC max.                       | 30 V                                     |
| Switching current DC                            | 100 mA                                   |
| Switching current max.                          | 6 A                                      |
| <b>Diagnostics</b>                              |                                          |
| Status indication LED                           | green                                    |
| <b>Device protection</b>                        |                                          |
| Condition lifetime                              | load-dependent                           |
| <b>Device protection   Electrical</b>           |                                          |
| Degree of protection (EN IEC 60529)             | IP20                                     |
| Rated insulation voltage                        | 250 V                                    |
| Electrical lifetime NC                          | 10000 Cycles                             |
| Electrical lifetime NO                          | 30000 Cycles                             |
| <b>Device protection   Mechanical</b>           |                                          |
| Mechanical endurance                            | 10000000 Cycles                          |
| <b>Mechanical data</b>                          |                                          |
| Drop-out time max.                              | 4 ms                                     |
| Response time max.                              | 8 ms                                     |
| <b>Mechanical data   Material data</b>          |                                          |
| Material contact                                | Ag Sn O2                                 |
| <b>Mechanical data   Mounting data</b>          |                                          |
| Mounting method                                 | geschnappt                               |
| Suitable for mounting type                      | mounting rail, (EN 60715)                |
| Height                                          | 93 mm                                    |
| Width                                           | 6,2 mm                                   |
| Depth                                           | 75,6 mm                                  |
| <b>Environmental characteristics   Climatic</b> |                                          |
| Operating temperature min.                      | -25 °C                                   |
| Operating temperature max.                      | 60 °C                                    |

