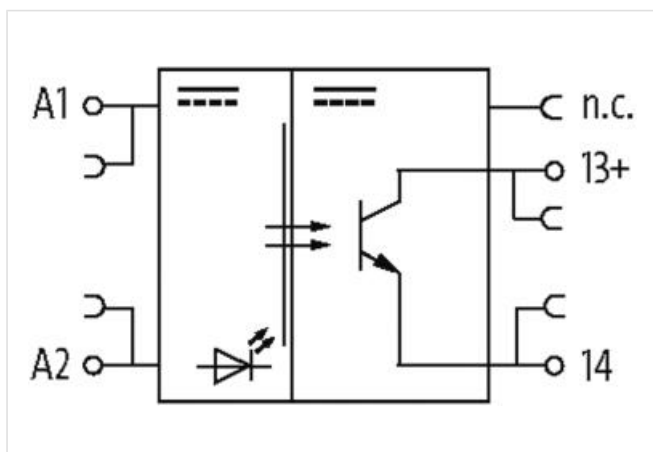


MIRO 6.2 PLUGGABLE PLUG IN MODULE OUTPUT RELAY

IN: 12 VAC/DC - OUT: 250 VAC/DC / 6 A

[Länk till produkt](#)**Illustration**

Produkten kan skilja sig från bilden

Kommersiella uppgifter

ECLASS-6.0	27371601
ECLASS-6.1	27371601
ECLASS-7.0	27371601
ECLASS-8.0	27371601
ECLASS-9.0	27371601
ECLASS-10.1	27371601
ECLASS-11.1	27371601
ECLASS-12.0	27371601
ETIM-5.0	EC001437
Förpackningsenhet	1
GTIN	4048879021388
Kundens tullnummer	85364900

Electrical data | Output

Power rating AC max.	1500 VA
Power rating DC max.	120 W
Switching voltage AC max.	250 V
Switching voltage DC max.	30 V
Switching current DC	10 mA
Switching current max.	6 A

Device protection | Electrical

Rated insulation voltage	300 V
--------------------------	-------

Mechanical data

Drop-out time max.	4 ms
Response time max.	8 ms

Mechanical data | Material data

Material contact	Ag Sn O2
------------------	----------

Mechanical data | Mounting data

Mounting method	inserted
-----------------	----------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	60 °C
Storage temperature min.	-40 °C
Storage temperature max.	60 °C