

MODLINK MSDD FRAME SINGLE METAL

Black



Frame: metal, black KTL

Lid: metal, black KTL

KTL stands for "cataphoretic immersion painting" and ensures that the product is given long-lasting protection from scratching and corrosion

Länk till produkt

Illustration

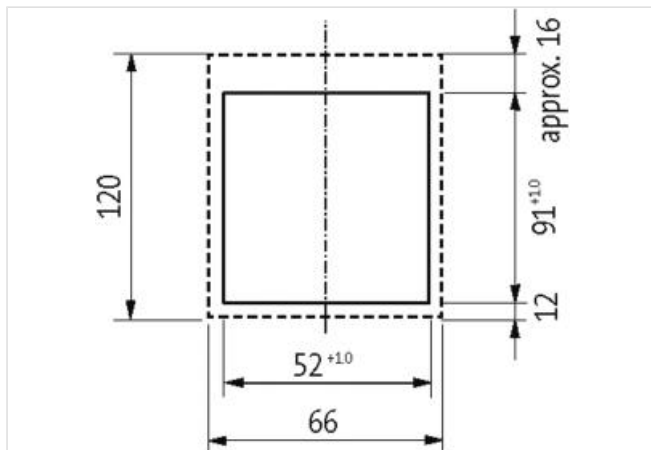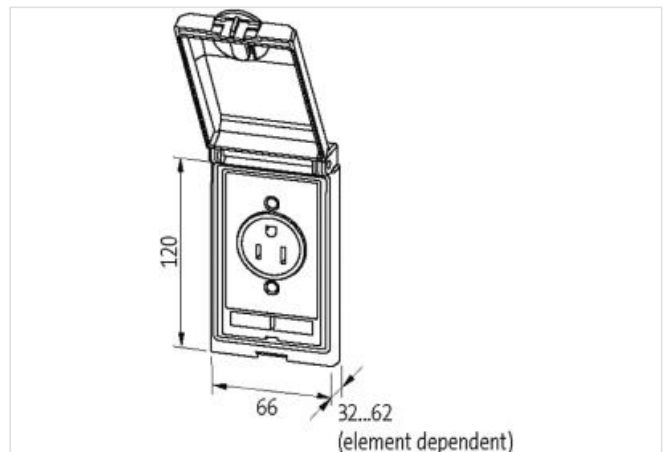

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27189217
ECLASS-6.1	27189260
ECLASS-7.0	27189260
ECLASS-8.0	27189260
ECLASS-9.0	27189260
ECLASS-10.1	27182810

ECLASS-11.1	27182810
-------------	----------

ECLASS-12.0	27182810
-------------	----------

ETIM-5.0	EC002625
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879036641
------	---------------

Kundens tullnummer	85389099
--------------------	----------

Mechanical data | Mounting data

Height	120 mm
--------	--------

Width	65 mm
-------	-------

Depth	38 mm
-------	-------

Frame

Degree of protection (EN IEC 60529)	IP65
-------------------------------------	------

Operating temperature min.	-10 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------

Storage temperature min.	-25 °C
--------------------------	--------

Storage temperature max.	60 °C
--------------------------	-------

Suitable for installation wall thickness min.	1 mm
---	------

Suitable for installation wall thickness max.	5 mm
---	------

Coating housing	KTL
-----------------	-----

Material housing	Fine zinc die casting
------------------	-----------------------